

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No. 1341.1059/JDH

First Named Inventor or Application Identifier:

Mayumi NOGUCHI, et al.

Express Mail Label No.

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

**ADDRESS TO: Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231**

1. ☒ Fee Transmittal Form
2. ☒ Specification, Claims & Abstract [Total Pages: 67]
3. ☒ Drawing(s) (35 USC 113) [Total Sheets: 13]
4. ☒ Oath or Declaration [Total Pages: 3]
 - a. ☒ Newly executed (original or copy)
 - b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional with Box 17 completed)
 - i. ☐ **DELETION OF INVENTOR(S)**
Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation by Reference (usable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. ☐ Microfiche Computer Program (Appendix)
7. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
 - a. ☐ Computer Readable Copy
 - b. ☐ Paper Copy (identical to computer copy)
 - c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☒ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement (when there is an assignee) [] Power of Attorney
10. ☐ English Translation Document (if applicable)
11. ☒ Information Disclosure Statement (IDS)/PTO-1449 ☒ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☐ Return Receipt Postcard (MPEP 503) (Should be specifically itemized)
14. ☐ Small Entity Statement(s) [] Statement filed in prior application, status still proper and desired.
15. ☒ Certified Copy of Priority Document(s) (if foreign priority is claimed)
16. ☐ Other:

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

[] Continuation [] Divisional [] Continuation-in-part (CIP) of prior application No: ____ / ____

18. CORRESPONDENCE ADDRESS

21171

PATENT TRADEMARK OFFICE

Staas & Halsey

APPARATUSES FOR GENERATION AND COLLECTION
OF INFORMATION, AND
COMPUTER-READABLE RECORDING MEDIUM

5 FIELD OF THE INVENTION

The present invention relates to an information collection apparatus and an information generation apparatus which collects information (e.g., logs) from a plurality of local machines (computer devices) or generates information.
10 This invention also relates to a computer-readable recording medium where an information collecting program is recorded, and a computer-readable recording medium where an information generating program is recorded.

15 BACKGROUND OF THE INVENTION

Conventionally, there has been used a computer system in which a plurality of computer devices are connected through a network based on the concept of network & computing. In this type of system, one of the computer devices collects logs
20 concerning occurrence of errors from the other computer devices, and the errors are handled based on the logs. In such a log-collection system, it is desirable that only the most possible important logs are collected from the viewpoints of utilization efficiency of resources.

25 The conventional type of information collection system

comprises a plurality of local machines, each of which is placed in a user side, and a remote machine that collects logs concerning occurrence of errors from the plurality of local machines via a network. In this information collection system, 5 a local machine generates a log caused by occurrence of an error, and stores the log on memory. When the memory becomes full, the local machine notifies the remote machine via the network that the memory is full.

Accordingly, the remote machine collects the logs from 10 the relevant local machine via the network and stores the logs on memory. From then on, the remote machine performs collection and storage of logs each time the remote machine receives notification from respective local machines. Further, when generating a log after the memory becomes full, the local 15 machine overwrites the memory with the relevant log. Accordingly, the old log stored on the memory is deleted.

As explained above, in the conventional type of information collection system, since the remote machine collects logs regardless of their priorities or importance, 20 there may come up such circumstances that a large amount of logs with low priorities may be collected whereas logs with high priorities may hardly be collected.

Therefore, under such circumstances, there have been extremely serious problems that error handling based on the logs 25 with high priorities may be delayed or error handling can not

be performed if the worst happens. Further, in the conventional type of information collection system, there is an upper limit to memory capacity of a remote machine and a local machine. Therefore, there has been a problem that utilization efficiency of memory resources is degraded when a large amount of logs with low priorities is stored on such memory.

Further, in the conventional type of information collection system, an old log is deleted by being overwritten with a new log at the point of time the memory becomes full. Therefore, if the importance of the old log is extremely high (e.g., the log caused by occurrence of a critical error), the system can do nothing about the error handling, which has a profound effect on the system.

15 SUMMARY OF THE INVENTION

It is an object of this invention to provide an information collection apparatus and an information generation apparatus, which can collect a larger amount of information with high priority and also can enhance utilization efficiency of memory resources, and also provide a computer-readable recording medium where an information collecting program is recorded and a computer-readable recording medium where an information generating program is recorded.

According to one aspect of this invention, each of a plurality of information generation apparatuses generates

information based on its specific generation factor and stores the information on a generation-side information storage unit. When the amount of information stored on the generation-side information storage unit reaches a predetermined amount, the relevant information generation apparatus then issues notification. Accordingly, an information collection unit collects the relevant information stored on the generation-side information storage unit of the relevant information generation apparatus only when the priority of the information generation apparatus is higher than the preset priority, namely only when the priority of the information generation apparatus is high. The collected information is then stored on a collection-side information storage unit. When the priority of the information generation apparatus is lower than the preset priority, the information is not collected from the relevant apparatus.

As explained above, respective priorities to be given to a plurality of information generation apparatuses are defined, and information is collected only from the information generation apparatus whose priority is high. Therefore, pieces of information generated in the information generation apparatuses with high priorities can be collected more as compared to those in the conventional case. Further, only the information generated in the information generation apparatus with a high priority is stored on the collection-side

information storage unit. Thus, it is possible to enhance the utilization efficiency of the collection-side information storage unit that has an upper limit to its storage capacity.

According to another aspect of this invention, each of
5 a plurality of information generation apparatuses generates information based on its specific generation factor and stores the information on a generation-side information storage unit.

When the amount of information stored on the generation-side information storage unit reaches a predetermined amount, the
10 relevant information generation apparatus then issues notification. Accordingly, an information collection unit collects pieces of information with priorities higher than the preset priority out of the information generated in the relevant information generation apparatus. The collected information

is then stored on a collection-side information storage unit.
15 When the priority of information is lower than the preset priority, the information is not collected.

Thus, only pieces of information with high priorities are collected. Therefore, of the information generated in the
20 relevant information generation apparatus, pieces of information with high priorities can be collected more as compared to those in the conventional case. Further, only the information with a high priority is stored on the collection-side information storage unit. Thus, it is

possible to enhance the utilization efficiency of the
25

collection-side information storage unit that has an upper limit to its storage capacity.

Further, the priorities of respective information corresponding to a plurality of information generation apparatuses are set separately, and even if the same type of information exists, each of the priorities can be made different between the plurality of information generation apparatuses. Thus, information can flexibly be collected according to the state of the respective information generation apparatuses.

According to still another aspect of this invention, each of a plurality of information generation apparatuses generates information due to its specific generation factor and stores the information on a generation-side information storage unit. When a certain error has occurred, the relevant information generation apparatus issues notification. Accordingly, an information collection unit collects the information stored on the generation-side information storage unit of the information generation apparatus. The collected information is stored on a collection-side information storage unit.

Thus, upon occurrence of a certain error in an information generation apparatus, information is collected from the relevant information generation apparatus. Thus, any error that has occurred can speedily be handled.

Further, each of a plurality of information generation apparatuses generates information based on its specific

generation factor and stores the information on a generation-side information storage unit. When a certain error has occurred, a substitution control unit allows an arbitrary information generation apparatus to act as a substitute to execute the operation of collecting information. Accordingly, the arbitrary information generation apparatus continues to collect information instead of the information collection apparatus.

Thus, even when a certain error has occurred, collecting information can be executed by an arbitrary information generation apparatus as a substitute. Thus, the collection of information can continuously be performed, which allows reliability to be enhanced.

Further, each of a plurality of information generation apparatuses generates information based on its specific generation factor and stores the information on a generation-side information storage unit. When a certain error has occurred, a substitution control unit allows any information generation apparatus with the lowest priority to act as a substitute to execute the operation of collecting information. Accordingly, the information generation apparatus with the lowest priority continues to collect information instead of the information collection unit.

Thus, when a certain error has occurred, any information generation apparatus with the lowest priority is allowed to act

as a substitute to execute the operation of collecting information. Therefore, the collection of information can be continued, which allows degradation in respective performance of the other information generation apparatuses with high priorities to be avoided.

According to still another aspect of this invention, upon generation of information in an information generation unit based on its specific generation factor, an information storage unit stores the generated information only when the information has a priority higher than the preset priority. When the priority of the generated information is lower than the preset priority, the information is not stored.

Thus, only information with a high priority is stored. Therefore, it is possible to enhance the utilization efficiency of the information storage unit that has an upper limit to its storage capacity.

According to still another aspect of this invention, each of a plurality of information generation apparatuses generates information based on its specific generation factor and stores the information on a generation-side information storage unit. When the amount of information stored on the generation-side information storage unit reaches a predetermined amount, the relevant information generation apparatus then issues notification. Accordingly, in an information collecting step, the information stored on the generation-side information

storage unit of the relevant information generation apparatus is collected only when the priority of the information generation apparatus is higher than the preset priority, namely only when the priority of the information generation apparatus is high. The collected information is then stored on a collection-side information storage unit in an information storing step. When the priority of the information generation apparatus is lower than the preset priority, the information is not collected from the relevant apparatus.

Thus, respective priorities to be given to a plurality of information generation apparatuses are defined, and information is collected only from the information generation apparatus whose priority is high. Therefore, information generated in the information generation apparatuses with high priorities can be collected more as compared to those in the conventional case. Further, only the information generated in the information generation apparatus with a high priority is stored on the collection-side information storage unit. Thus, it is possible to enhance the utilization efficiency of the collection-side information storage unit that has an upper limit to its storage capacity.

According to still another aspect of this invention, upon generation of information in an information generating step due to its specific generation factor, in an information storing step, the generated information is stored on an information

storage unit only when the information has a priority higher than the preset priority. When the priority of the generated information is lower than the preset priority, the information is not stored.

5 Thus, only information with a high priority is stored. Therefore, it is possible to enhance the utilization efficiency of the information storage unit that has an upper limit to its storage capacity.

10 Other objects and features of this invention will become apparent from the following description with reference to the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

15 Fig. 1 is a block diagram showing a configuration of an embodiment of the present invention;

 Fig. 2 shows a detail configuration of the local-machine log priority table TA shown in Fig. 1;

 Fig. 3 shows a data structure of local-machine log storage areas Z_1 to Z_n shown in Fig. 1;

20 Fig. 4 shows individual local-machine log priority tables TB_1 to TB_n shown in Fig. 1;

 Fig. 5 shows a data structure of local-machine log storage areas Z_1 to Z_n in a fifth example of operation of the embodiment;

25 Fig. 6 is a flow chart showing a first example of operation of the embodiment;

Fig. 7 is a flow chart showing a second example of operation of the embodiment;

Fig. 8 is a flow chart showing a third example of operation of the embodiment;

5 Fig. 9 is a flow chart showing a fourth example of operation of the embodiment;

Fig. 10 is a flow chart showing the fifth example of operation of the embodiment;

10 Fig. 11 is a flow chart showing a sixth example of operation of the embodiment;

Fig. 12 is a flow chart showing a seventh example of operation of the embodiment; and

Fig. 13 is a block diagram showing a variant of the embodiment.

15

DESCRIPTION OF THE PREFERRED EMBODIMENTS

A preferred embodiment of the information collection apparatus, the information generation apparatus, the computer-readable recording mediums according to the present invention will be explained in detail below with reference to the drawings.

Fig. 1 is a block diagram showing a configuration of an embodiment of this invention. As shown in this figure, a remote machine 100 is connected to local machines 300₁ to 300_n via a network N, a communication adapter 200, and communication

adapters 400_1 to 400_n .

The remote machine 100 is a computer device installed in a remote center. This remote machine 100 remotely monitors the local machines 300_1 to 300_n via the network N, the communication adapter 200, and the communication adapters 400_1 to 400_n , and also collects local-machine logs as error records occurring in the local machines 300_1 to 300_n . The factor by which a local-machine log (henceforth, log factor) is generated includes occurrence of a hardware error, a firmware error/software error, a line error/protocol error, and a warning error or an insignificant error.

The hardware error is an error when abnormal conditions occur in hardware of the local machines 300_1 to 300_n or the communication adapters 400_1 to 400_n . The firmware error/software error is an error when abnormal conditions occur in the firmware, when abnormal conditions occur in the software, or when environment settings are not correctly performed. The line error/protocol error is an error when abnormal conditions occur in transmission over the network N, or when abnormal conditions occur in any communication protocol between the remote machine 100 and the local machines 300_1 to 300_n . The warning error is an error when abnormal conditions occur at such an alarm level that machine operation is not much affected by the abnormality. The insignificant error is an error when abnormal conditions occur at a low level so that machine

operation is not affected by the abnormality.

The remote machine 100 comprises a CPU (Central Processing Unit) 100, a memory 120, a timer 130, and an I/F (Interface) 140. The CPU 110 provides controls for collection
5 of local-machine logs, monitoring of errors concerning the remote machine 100, and read/write of data from/onto the memory 120. The details of the operation of this CPU 110 are explained later. The memory 120 stores the local-machine logs or the like under the control of the CPU 110.

10 The data structure of this memory 120 is explained later. The timer 130 outputs the result of recording the time to the CPU 110. The I/F 140 interfaces between the CPU 110 and the communication adapter 200. The communication adapter 200 is inserted between the I/F 140 and the network N, and performs
15 communications with the communication adapters 400_1 to 400_n according to a predetermined communication protocol.

Each of the local machines 300_1 to 300_n is a computer device installed in the user side, and is remotely monitored by the remote machine 100 via the communication adapters 400_1 to 400_n ,
20 the network N, and the communication adapter 200. The local machines 300_1 to 300_n write local-machine logs LOG_{LM1} to LOG_{LMn} , as records of errors (a hardware error, a firmware error/software error, a line error/protocol error, a warning error or an insignificant error) occurring during operation,
25 onto memories 320_1 to 320_n , respectively.

An IP address AD_{IP} as an address on the network N is assigned to each of the local machines 300_1 to 300_n . For example, IP address AD_{IP} "1" is assigned to the local machine 300_1 , and IP address AD_{IP} "2" is assigned to the local machine 300_2 .
5 Similarly, IP address AD_{IP} "n" is assigned to the local machine 300_n .

The local machine 300_1 comprises a CPU 310_1 , a memory 320_1 , a timer 330_1 , and an I/F 340_1 . This CPU 310_1 provides controls for monitoring of an error concerning the remote machine 300_1 ,
10 generation of a local-machine log LOG_{LM1} corresponding to the error, and read/write of data from/onto the memory 320_1 . The details of the operation of this CPU 310_1 are explained later.

The memory 320_1 stores the local-machine log LOG_{LM1} or the like under the control of the CPU 310_1 . The data structure of
15 this memory 320_1 is explained later. The I/F 340_1 interfaces between the CPU 310_1 and the communication adapter 400_1 . This communication adapter 400_1 is inserted between the I/F 340_1 and the network N , and performs communications with the communication adapter 200 via the network N according to the
20 predetermined communication protocol.

In the same manner as the local machine 300_1 , the local machine 300_2 comprises a CPU 310_2 , a memory 320_2 , a timer 330_2 , and an I/F 340_2 . This CPU 310_2 provides controls for monitoring of an error concerning the remote machine 300_2 , generation of
25 a local-machine log LOG_{LM2} corresponding to the error, and

read/write of data from/onto the memory 320₂. The details of the operation of this CPU 310₂ are explained later.

The memory 320₂ stores the local-machine log LOG_{LM2} under the control of the CPU 310₂. The data structure of this memory 320₂ is explained later. The I/F 340₂ interfaces between the CPU 310₂ and the communication adapter 400₂. This communication adapter 400₂ is inserted between the I/F 340₂ and the network N, and performs communications with the communication adapter 200 via the network N according to the predetermined communication protocol.

In the same manner as the local machine 300₁, the local machine 300_n comprises a CPU 310_n, a memory 320_n, a timer 330_n, and an I/F 340_n. This CPU 310_n provides controls for monitoring of an error concerning the remote machine 300_n, generation of a local-machine log LOG_{LMn} corresponding to the error, and read/write of data from/onto the memory 320_n. The details of the operation of this CPU 310_n are explained later.

The memory 320_n stores the local-machine log LOG_{LMn} under the control of the CPU 310_n. The data structure of this memory 320_n is explained later. The I/F 340_n interfaces between the CPU 310_n and the communication adapter 400_n. This communication adapter 400_n is inserted between the I/F 340_n and the network N, and performs communications with the communication adapter 200 via the network N according to the predetermined communication protocol.

The data structure of the memories 320_1 to 320_n in the local machines 300_1 to 300_n is explained below. The local-machine log priority table TA and the individual local-machine log priority table TB_1 are stored on the memory 320_1 of the local
5 machine 300_1 .

The CPU 310_1 of the local machine 300_1 generates local-machine logs (hardware error log to insignificant error log) corresponding to five types of log factors in total shown in Fig. 2. The first type of hardware error log is generated
10 due to the hardware error by the CPU 310_1 . The second type of firmware error/software error log is generated due to the firmware error/software error.

The third type of line error/protocol error log is generated due to the line error/protocol error. The fourth type
15 of warning error log is generated due to the warning error. Finally, the fifth type of insignificant error log is generated due to the insignificant error. Each of these local-machine logs consists of information such as a log factor, date and time of occurrence of an error, and place where the error occurs,
20 namely the logs are historical data for occurrences of errors.

The local-machine log priority table TA defines respective priorities (degrees of importance) of the five types of local-machine logs (hardware error log to insignificant error log) with five levels from "1" to "5". Local-machine log
25 priority data P_{LL} indicates the priority, and any of the values

from "1" to "5" is taken. Where the local-machine log priority data P_{LL} of "1" is the highest priority, whereas the local-machine log priority data P_{LL} of "5" is the lowest priority.

In other words, the hardware error log indicated by the
5 local-machine log priority data P_{LL} of "1" is one with the highest priority. The firmware error/software error log indicated by the local-machine log priority data P_{LL} of "2" is one with the next highest priority to the hardware error log. The line error/protocol error log indicated by the local-machine log
10 priority data P_{LL} of "3" is one with the priority following the firmware error/software error log.

The warning error log indicated by the local-machine log priority data P_{LL} of "4" is one with the priority following the line error/protocol error log. The insignificant error log
15 indicated by the local-machine log priority data P_{LL} of "5" is one with the lowest priority. The individual local-machine log priority table TB_1 is explained in detail in the fifth example of operation, that is explained later.

Referring to Fig. 1, area X_1 is where a remote-machine
20 substitute request flag X_{11} is stored. This remote-machine substitute request flag X_{11} indicates whether the local machine 300₁ has been requested from the remote machine 100 to act as a substitute to execute the operation of collecting local-machine logs (henceforth, collection of local-machine logs),
25 that should originally be executed by the remote machine 100,

when any critical error has occurred in the remote machine 100.
When the local machine 300₁ has been requested to execute the
collection of local-machine logs for the remote machine 100,
the remote-machine substitute request flag X₁₁ is set to "1".

5 On the other hand, when there has been no request to execute
the collection of local-machine logs, the remote-machine
substitute request flag X₁₁ is set to "0".

Area Y₁ is where remote-machine substitute declaration
flags Y₁₁ to Y_{1n} are stored. The remote-machine substitute
10 declaration flags Y₁₁ to Y_{1n} correspond to the local machines
300₁ to 300_n, and are used for declaration by each of the machines
to act as a substitute to execute the collection of local-
machine logs for the remote machine 100. For example, when the
local machine 300₂ executes the collection of local-machine logs
15 for the remote machine 100, the remote-machine substitute
declaration flag Y₁₂ corresponding to the local machine 300₂ is
set to "1", and all of the other remote-machine substitute
declaration flags Y₁₁, Y₁₃ (not shown) to Y_{1n} is set to "0".

Local-machine logs LOG_{LMI_1} to LOG_{LMI_3}, ... related to the
20 local machine 300₁ are stored on the local-machine log storage
area Z₁ as shown in Fig. 3 in order of their generation in
correlation with the local-machine log priority data P_{LL}. The
local-machine log priority data P_{LL} and local-machine logs are
correlated with each other based on the local-machine log
25 priority table TA. Further, the data for the IP address AD_{IP}

(="1") assigned to the local machine 300₁ is stored on the local-machine log storage area Z₁.

The local-machine log priority table TA and the individual local-machine log priority table TB₂ are stored on the memory 320₂ of the local machine 300₂. The CPU 310₂ of the local machine 300₂ generates local-machine logs (hardware error log to insignificant error log) corresponding to the five types of log factors in total shown in Fig. 2 in the same manner as that of the CPU 310₁.

10 An area X₂ is where a remote-machine substitute request flag X₂₁ is stored. This remote-machine substitute request flag X₂₁ indicates whether the local machine 300₂ has been requested from the remote machine 100 to act as a substitute to execute the collection of local-machine logs, that should originally
15 be executed by the remote machine 100, when any critical error has occurred in the remote machine 100. When the local machine 300₂ has been requested to execute the collection of local-machine logs for the remote machine 100, the remote-machine substitute request flag X₂₁ is set to "1". On the other hand,
20 when there has been no request to execute the collection of local-machine logs, the remote-machine substitute request flag X₂₁ is set to "0".

Area Y₂ is where remote-machine substitute declaration flags Y₂₁ to Y_{2n} are stored. The remote-machine substitute
25 declaration flags Y₂₁ to Y_{2n} correspond to the local machines

300₁ to 300_n, and are used for declaration by each of the machines to execute the collection of local-machine logs for the remote machine 100. For example, when the local machine 300₂ executes the collection of local-machine logs for the remote machine 100,
5 the remote-machine substitute declaration flag Y₂₂ corresponding to the local machine 300₂ is set to "1", and all of the other remote-machine substitute declaration flags Y₂₁, Y₂₃ (not shown) to Y_{2n} is set to "0".

Local-machine logs LOG_{LM2_1} to LOG_{LM2_3}, ... related to the
10 local machine 300₂ are stored on the local-machine log storage area Z₂ in correlation with the local-machine log priority data P_{LL} in order of their generation as shown in Fig. 3. The local-machine log priority data P_{LL} and local-machine logs are correlated with each other based on the local-machine log
15 priority table TA. Further, the data for the IP address AD_{IP} ("2") assigned to the local machine 300₂ is stored on the local-machine log storage area Z₂. The individual local-machine log priority table TB₂ is explained later in the fifth example of operation.

20 Similarly, the local-machine log priority table TA and the individual local-machine log priority table TB_n are stored on the memory 320_n of the local machine 300_n. The CPU 310_n of the local machine 300_n generates local-machine logs (hardware error log to insignificant error log) corresponding to the five
25 types of log factors in total shown in Fig. 2 in the same manner

as that of the CPU 310₁.

Area X_n is where a remote-machine substitute request flag X_{n1} is stored. This remote-machine substitute request flag X_{n1} indicates whether the local machine 300_n has been requested from the remote machine 100 to act as a substitute to execute the collection of local-machine logs, that should originally be executed by the remote machine 100, when any critical error has occurred in the remote machine 100. When the local machine 300_n has been requested to execute the collection of local-machine logs for the remote machine 100, the remote-machine substitute request flag X_{n1} is set to "1". On the other hand, when there has been no request to execute the collection of local-machine logs, the remote-machine substitute request flag X_{n1} is set to "0".

Area Y_n is where remote-machine substitute declaration flags Y_{n1} to Y_{nn} are stored. The remote-machine substitute declaration flags Y_{n1} to Y_{nn} correspond to the local machines 300₁ to 300_n, and are used for declaration by each of the machines to execute the collection of local-machine logs for the remote machine 100. For example, when the local machine 300_n executes the collection of local-machine logs for the remote machine 100, the remote-machine substitute declaration flag Y_{nn} corresponding to the local machine 300_n is set to "1", and all of the other remote-machine substitute declaration flags Y_{n1} to Y_{nn-1} (not shown) is set to "0".

Local-machine logs LOG_{LMn_1} to LOG_{LMn_3} , ... related to the local machine 300_n are stored on the local-machine log storage area Z_n in correlation with the local-machine log priority data P_{LL} in order of their generation as shown in Fig. 3. The local-machine log priority data P_{LL} and the local-machine logs are correlated with each other based on the local-machine log priority table TA. Further, the data for the IP address AD_{IP} ("n") assigned to the local machine 300_n is stored on the local-machine log storage area Z_n . The individual local-machine log priority table TB_n is explained later in the fifth example of operation.

The data structure of the memory 120 in the remote machine 100 is explained below. A local machine priority table T is stored on this memory 120. This local machine priority table T defines the respective priorities (degrees of importance) of the local machines 300_1 to 300_n with three levels from "1" to "3".

For example, the IP address AD_{IP} ("1" to "n") assigned to the respective local machines 300_1 to 300_n is correlated with local machine priority data P_{LM} . This local machine priority data P_{LM} represents the priority, and any of values of "1" to "3" is taken. Where the local machine priority data P_{LM} of "1" is the highest priority, whereas the local machine priority data P_{LM} of "3" is the lowest priority.

A local machine with the local machine priority data P_{LM}

of "1" is a machine where troubles often occur or a machine of an important user that requires urgent handling at the time of occurrence of trouble. On the other hand, a local machine with the local machine priority data P_{LM} of "3" is a machine that runs under normal conditions or a machine of a general user that does not require urgent handling at the time of occurrence of trouble. A local machine with the local machine priority data P_{LM} of "2" ranks as an intermediate one between the local machine with the local machine priority data P_{LM} of "1" and the local machine with the local machine priority data P_{LM} of "3".

Local-machine logs collected from at least one of the local machines 300_1 to 300_n are stored on a local-machine log storage area F. Remote-machine logs concerning the remote machine 100 are stored on a remote log storage area G. Various types of data used when local-machine logs are collected are stored on a data storage area L for collection of local-machine logs.

In this data storage area L for collection of local-machine logs, 2-bit (bit A_1 , bit A_2) threshold data P_A for local machine priorities is stored on a storage area A. This local-machine priority threshold data P_A is a threshold value used for collecting local-machine logs from the local machines 300_1 to 300_n . In this case, a local-machine log is collected from a local machine with a local machine priority higher than the priority corresponding to the local-machine priority

threshold data P_A .

Memory-full flags B_1 to B_n are stored on a storage area B. These memory-full flags B_1 to B_n correspond to the memories 320_1 to 320_n , and indicate whether local-machine logs reaching
5 full storage capacity are stored on the local-machine log storage areas Z_1 to Z_n . In other words, each of the memory-full flags B_1 to B_n indicates whether each of the memories 320_1 to 320_n is full.

For example, when the maximum possible capacity of
10 local-machine logs is stored on the local-machine log storage area Z_2 of the memory 320_2 and the area Z_2 has entered a full state of memory, the memory-full flag B_2 is set to "1". At this point of time, assuming that the other memories 320_1 , 320_3 (not shown) to 320_n are not in the full state of memory, the
15 corresponding memory-full flags B_1 , B_3 (not shown) to B_n are set to "0".

3-bit (bits C_{11} to C_{13} , bits C_{21} to C_{23} , ..., bits C_{n1} to C_{n3}) threshold data P_{c1} to P_{cn} for local-machine log priorities is stored on a storage area C. The respective local-machine log
20 priority threshold data P_{c1} to P_{cn} correspond to the local machines 300_1 to 300_n , and any value of local-machine log priorities "1" to "5" (decimal) is taken in each of the data.

The local-machine log priority threshold data P_{c1} is a threshold value used for collecting local-machine logs from the
25 local machine 300_1 . In this case, the local-machine logs each

with a local-machine log priority higher than the priority corresponding to the local-machine log priority threshold data P_{c1} are collected from the local machine 300_1 .

The local-machine log priority threshold data P_{c2} is a threshold value used for collecting local-machine logs from the local machine 300_2 . In this case, the local-machine logs each with a local-machine log priority higher than the priority corresponding to the local-machine log priority threshold data P_{c2} are collected from the local machine 300_2 .

Similarly, the local-machine log priority threshold data P_{cn} is a threshold value used for collecting local-machine logs from the local machine 300_n . In this case, the local-machine logs each with a local-machine log priority higher than the priority corresponding to the local-machine log priority threshold data P_{cn} are collected from the local machine 300_n .

Critical error flags D_1 to D_n are stored on a storage area D . These critical error flags D_1 to D_n correspond to the local machines 300_1 to 300_n , and indicate whether a critical error has occurred in the local machines 300_1 to 300_n . The critical error we mention here indicates an error which causes the corresponding local machine to disable its proper performance or which is a probable cause of the failure, and includes a hardware error (see Fig. 2).

For example, when a critical error has occurred in the local machine 300_2 , the critical error flag D_2 corresponding

to the local machine 300₂ is set to "1". At this point of time, assuming that no critical error has occurred in the other local machines 300₁, and 300₃ to 300_n, the corresponding critical error flags D₁, D₃ (not shown) to D_n are set to "0".

5 3-bit (bits E₁₁ to E₁₃, bits E₂₁ to E₂₃, ..., bits E_{n1} to E_{n3}) individual local-machine log priority threshold data P_{E1} to P_{En} is stored on a storage area E. The details of the individual local-machine log priority threshold data P_{E1} to P_{En} are explained later in the fifth example of operation.

10 First Example of Operation :

A first example of operation of the embodiment is explained below with reference to the flow chart shown in Fig. 6. In this example, the remote machine 100 collects local-machine logs from a local machine, whose memory is full, of the
15 local machines 300₁ to 300_n, and whose machine priority is higher than the previously initialized priority.

At step SA1 as shown in Fig. 6, the CPU 110 of the remote machine 100 initializes the local-machine priority threshold
20 data P_A. In this case, the CPU 110 initializes "2" (decimal) as the local-machine priority threshold data P_A. Accordingly, "01" (binary) corresponding to the "2" (decimal) are set in the bits A₁ and A₂ on the storage area A of the memory 120. Further, the CPU 110 checks the memory-full flags B₁ to B_n at predetermined
25 time intervals based on the result of recording the time

obtained from the timer 130.

At step SA2, the CPU 110 initializes the local machine priority table T. In this case, the CPU 110 sets "2" in the local machine priority data P_{LM} corresponding to the IP address AD_{IP} (= "1" : local machine 300₁), and also sets "1" in the local machine priority data P_{LM} corresponding to the IP address AD_{IP} (= "2" : local machine 300₂). The CPU 110 sets "3" in the local machine priority data P_{LM} corresponding to the IP address AD_{IP} (= "n" : local machine 300_n) in the same manner as explained above.

At step SA3, each of the CPUs 310₁ to 310_n of the local machines 300₁ to 300_n stores a local-machine log (e.g., hard error log, firmware error/software error log), each time an error (e.g., hardware error, firmware error/software error) occurs, on the respective local-machine log storage areas Z_1 to Z_n in correlation with the local-machine log priority data P_{LL} (see Fig. 3). The local-machine log priority table TA (see Fig. 2) is referred to for this correlation.

For example, the CPU 310₁ of the local machine 300₁ correlates, as shown in Fig. 3, the local-machine log LOG_{LM1_1} with the local-machine log priority data P_{LL} (= "1"), and stores the data on the local-machine log storage area Z_1 of the memory 320₁. Similarly, the CPU 310₂ of the local machine 300₂ correlates, as shown in Fig. 3, the local-machine log LOG_{LM2_1} with the local-machine log priority data P_{LL} (= "5"), and stores

the data on the local-machine log storage area Z_2 of the memory 320₂.

The CPU 310_n of the local machine 300_n correlates the local-machine log LOG_{LMn_1} with the local-machine log priority data P_{LL} (= "4"), and stores the data on the local-machine log storage area Z_n of the memory 320_n in the same manner as explained above, as shown in Fig. 3.

At step SA4, each of the CPUs 310₁ to 310_n determines whether any of the local-machine log storage areas Z_1 to Z_n of the memories 320₁ to 320_n is in a full state of memory. In this case, each of the CPUs 310₁ to 310_n determines that the result of determination is "No". Therefore, the operational sequence from step SA3 is repeated. Accordingly, the local-machine logs are stored on each of the local-machine log storage areas Z_1 to Z_n shown in Fig. 3 in order of their generation.

When the local-machine log storage area Z_2 has entered a full state of memory due to frequent occurrences of errors in the local machine 300₂, the CPU 310₂ determines that the result of determination at step SA4 is "Yes".

At step SA5, the CPU 310₂ accesses the storage area B of the memory 120 via the I/F 340₂, the communication adapter 400₂, the network N, the communication adapter 200, and the I/F 140. The CPU 310₂ then sets the memory-full flag B₂ that corresponds to the local machine 300₂, of the memory-full flags B₁ to B_n of the storage area B, to "1".

Accordingly, at step SA6, the CPU 110 of the remote machine 100 recognizes that the local-machine log storage area Z_2 of the local machine 300₂ is in the full state of memory, and refers to the local machine priority table T. The CPU 110
5 recognizes the local machine priority data P_{LM} (= "1") for the local machine 300₂ from the local machine priority table T.

At step SA7, the CPU 110 determines whether the local machine priority data P_{LM} (= "1") for the local machine 300₂ is lower than the local-machine priority threshold data P_A (in this
10 case, "2") initialized at step SA1. In other words, the CPU 110 determines whether the priority of the local machine 300₂ is higher than the priority set at step SA1.

In this case, the CPU 110 determines that the result of determination at step SA7 is "Yes". At step SA8, the CPU 110
15 accesses the memory 320₂ via the I/F 140, the communication adapter 200, the network N, the communication adapter 400₂, and the I/F 340₂. The CPU 110 then collects the local-machine logs LOG_{LM2_1} to LOG_{LM2_3} stored on the local-machine log storage area Z_2 of the memory 320₂ as the local-machine log LOG_{LM2} .

20 At step SA9, the CPU 110 stores the local-machine log LOG_{LM2} on the local-machine log storage area F of the memory 120. At step SA10, the CPU 110 sets the memory-full flag B_2 corresponding to the local machine 300₂, from which the local-machine log LOG_{LM2} has been collected, from "1" to "0".

25 As step SA3 and from then on, the operation is repeated.

When a new local-machine log is generated in the local machine 300₂ after the local-machine logs are collected, the CPU 310₂ overwrites the local-machine log storage area Z₂ with the new local-machine log. By this overwriting, the old local-machine log is deleted, but this old local-machine log has already been stored on the local-machine log storage area F of the remote machine 100.

When the local-machine log storage area Z_n has entered a full state of memory due to frequent occurrences of errors in the local machine 300_n, the CPU 310_n determines that the result of determination at step SA4 is "Yes".

At step SA5, the CPU 310_n accesses the storage area B of the memory 120 via the I/F 340_n, the communication adapter 400_n, the network N, the communication adapter 200, and the I/F 140 in the same manner as the operation of the CPU 310₂. The CPU 310_n then sets the memory-full flag B_n that corresponds to the local machine 300_n, of the memory-full flags B₁ to B_n of the storage area B, to "1".

Accordingly, at step SA6, the CPU 110 of the remote machine 100 recognizes that the local-machine log storage area Z_n of the local machine 300_n is in the full state of memory, and refers to the local machine priority table T. The CPU 110 recognizes the local machine priority data P_{LM} (= "3") for the local machine 300_n from the local machine priority table T.

At step SA7, the CPU 110 determines whether the local

machine priority data P_{LM} (= "3") for the local machine 300_n is lower than the local-machine priority threshold data P_A (in this case, "2") initialized at step SA1.

In this case, the CPU 110 determines that the result of determination at step SA7 is "No". Therefore, the operational sequence from step SA3 is repeated. In other words, since the priority of the local machine 300_n is lower than the priority set at step SA1, the local-machine log LOG_{LM} is not collected from the local machine 300_n .

As explained above, according to the first example of operation of the embodiment, priorities to be given to n units of local machines 300_1 to 300_n are defined, and a local-machine log is collected only from a local machine with a high priority. Therefore, local-machine logs generated in local machines each with a high priority can be collected more as compared to those in the conventional case. Further, only local-machine logs generated in local machines each with a high priority are stored on the local-machine log storage area F of the memory 120. Therefore, it is possible to enhance the utilization efficiency of the memory 120 that has an upper limit to its storage capacity.

Second Example of Operation :

A second example of operation of the embodiment is explained below with reference to the flow chart shown in Fig.

7. In this example, the remote machine 100 collects local-

machine logs, each of which has a local-machine log priority higher than the previously initialized priority. In other words, these local-machine logs are collected from the local-machine logs of a local machine, whose memory is full,
5 of the local machines 300_1 to 300_n .

At step SB1 as shown in Fig. 7, the CPU 110 of the remote machine 100 initializes each of the local-machine log priority threshold data P_{c1} to P_{cn} . In this case, the CPU 110 initializes "2" (decimal) out of "1" to "5" as the local-machine log priority
10 threshold data P_{c1} . Accordingly, "001" (binary) corresponding to the "2" (decimal) are set in the bits C_{11} to C_{13} on the storage area C of the memory 120.

Similarly, the CPU 110 initializes "3" (decimal) out of "1" to "5" as the local-machine log priority threshold data P_{c2} .
15 Accordingly, "010" (binary) corresponding to the "3" (decimal) are set in the bits C_{21} to C_{23} on the storage area C of the memory 120.

The CPU 110 initializes "5" (decimal) out of "1" to "5" as the local-machine log priority threshold data P_{cn} in the same
20 manner as explained above. Accordingly, "100" (binary) corresponding to the "5" (decimal) are set in the bits C_{n1} to C_{n3} on the storage area C of the memory 120. Further, the CPU 110 checks the memory-full flags B_1 to B_n at predetermined time intervals based on the result of recording the time obtained
25 from the timer 130.

At step SB2, each of the CPUs 310₁ to 310_n of the local machines 300₁ to 300_n stores a local-machine log, each time an error occurs, on the respective local-machine log storage areas Z₁ to Z_n in correlation with the local-machine log priority data P_{LL} in the same manner as the step SA3 (see Fig. 6).

At step SB3, each of the CPUs 310₁ to 310_n determines whether any of the local-machine log storage areas Z₁ to Z_n of the memories 320₁ to 320_n is in a full state of memory. In this case, each of the CPUs 310₁ to 310_n determines that the result of determination is "No". Therefore, the operational sequence from step SB2 is repeated. Accordingly, the local-machine logs are stored on each of the local-machine log storage areas Z₁ to Z_n shown in Fig. 3 in order of their generation.

When the local-machine log storage area Z₂ has entered a full state of memory due to frequent occurrences of errors in the local machine 300₂, the CPU 310₂ determines that the result of determination at step SB3 is "Yes".

At step SB4, the CPU 310₂ accesses the storage area B of the memory 120 via the I/F 340₂, the communication adapter 400₂, the network N, the communication adapter 200, and the I/F 140 in the same manner as the step SA5 (see Fig. 6). The CPU 310₂ then sets the memory-full flag B₂ to "1".

Accordingly, at step SB5, the CPU 110 of the remote machine 100 recognizes that the local-machine log storage area Z₂ of the local machine 300₂ is in the full state of memory.

The CPU 110 then refers to the local-machine log priority threshold data P_c (in this case, $P_{c2} = "3"$) corresponding to the local machine 300₂, of the local-machine log priority threshold data P_{c1} to P_{cn} .

5 At step SB6, the CPU 110 accesses the local-machine log storage area Z_2 (see Fig. 3) of the memory 320₂ via the I/F 140, the communication adapter 200, the network N, the communication adapter 400₂, and the I/F 340₂.

10 At step SB7, the CPU 110 determines whether the local-machine log priority data P_{LL} (= "5") in a first record shown in Fig. 3 is lower than the local-machine log priority threshold data P_{c2} (in this case, "3") referred to at step SB5. In other words, the CPU 110 determines whether the priority of the local-machine logs LOG_{LM2_1} is higher than the priority set
15 at step SB1.

 In this case, the CPU 110 determines that the result of determination at step SB7 is "No". At step SB10, the CPU 110 determines whether there is a next local-machine log on the local-machine log storage area Z_2 . In this case, the CPU 110
20 determines that the result of determination is "Yes".

 At step SB7, the CPU 110 determines whether the local-machine log priority data P_{LL} (= "2") in a second record shown in Fig. 3 is lower than the local-machine log priority threshold data P_{c2} (in this case, "3") referred to at step SB5.
25 In this case, the CPU 110 determines that the result of

determination at step SB7 is "Yes". At step SB8, the CPU 110 collects the secondly-recorded local-machine log LOG_{LM2_2} of the local-machine log storage area Z₂ via the I/F 340₂, the communication adapter 400₂, the network N, the communication
5 adapter 200, and the I/F 140.

At step SB9, the CPU 110 stores the local-machine log LOG_{LM2_2} on the local-machine log storage area F of the memory 120. At step SB10, the CPU 110 determines whether there is a next local-machine log on the local-machine log storage area
10 Z₂. In this case, the CPU 110 determines that the result of determination is "Yes", and returns to step SB7.

The operation is repeated from then on. Local-machine logs each of which has a local-machine log priority higher than the priority initialized at step SB1, of the plurality of
15 local-machine logs stored on the local-machine log storage area Z₂, are collected by the CPU 110 of the remote machine 100.

When the processing for the last record of the local-machine log storage area Z₂ is finished, the CPU 110 determines that the result of determination at step SB10 is "No". At step
20 SB11, the CPU 110 sets the memory-full flag B₂ corresponding to the local machine 300₂ from "1" to "0". The operation is repeated at step SB2 and from then on.

As explained above, according to the second example of operation of the embodiment, only local-machine logs with high
25 priorities are collected. Therefore, local-machine logs with

high priorities, of the local-machine logs generated in the relevant local machine, can be collected more as compared to those in the conventional case.

5 Third Example of Operation :

A third example of operation of the embodiment is explained below with reference to the flow chart shown in Fig. 8. In this example, each of the local machines 300_1 to 300_n stores a local-machine log on the corresponding local-machine log storage area only when the priority of the local-machine log, that corresponds to a log factor at the time of occurrence of the log factor, is higher than the previously initialized priority.

At step SC1 as shown in Fig. 8, the CPU 110 of the remote machine 100 initializes each of the local-machine log priority threshold data P_{c1} to P_{cn} in the same manner as the step SB1 (see Fig. 7). In this case, the CPU 110 initializes "2" (decimal) out of "1" to "5" as the local-machine log priority threshold data P_{c1} , and also "3" (decimal) as the local-machine log priority threshold data P_{c2} .

The CPU 110 then initializes "5" (decimal) in respective bits as the local-machine log priority threshold data P_{cn} in the same manner as explained above. Further, the CPU 110 checks the memory-full flags B_1 to B_n at predetermined time intervals based on the result of recording the time obtained from the timer

130.

At step SC2, each of the CPUs 310_1 to 310_n of the local machines 300_1 to 300_n determines whether a log factor (e.g., hardware error, firmware error/software error) has occurred, and repeats the processing of determination when the result of determination is "No". For example, when an insignificant error has occurred as a log factor in the local machine 300_2 , the CPU 310_2 determines that the result of determination at step SC2 is "Yes".

At step SC3, the CPU 310_2 accesses the memory 120 via the I/F 340_2 , the communication adapter 400_2 , the network N, the communication adapter 200, and the I/F 140. The CPU 310_2 then refers to the local-machine log priority threshold data P_c (in this case, P_{c2} = "3") corresponding to the local machine 300_2 , of the local-machine log priority threshold data P_{c1} to P_{cn} .

At step SC4, the CPU 310_2 checks the local-machine log priority data P_{LL} (= "5") of the local-machine log corresponding to the log factor (in this case, an insignificant error) occurring at step SC2 by referring to the local-machine log priority table TA. The CPU 310_2 then determines whether the local-machine log priority data P_{LL} (= "5") is lower than the local-machine log priority threshold data P_{c2} (in this case, "3"). In other words, the CPU 310_2 determines whether the priority of the relevant local-machine log is higher than the priority set at step SC1.

In this case, the CPU 310₂ determines that the result of determination at step SC4 is "No". Therefore, the operational sequence from step SC2 is repeated. When a hardware error as a log factor has occurred in the local machine 300₂, the CPU 310₂ determines that the result of determination at step SC2 is "Yes".

At step SC3, the CPU 310₂ refers to the local-machine log priority threshold data P_c (in this case, $P_{c2} = "3"$) corresponding to the local machine 300₂ in the same manner as the operation explained above. At step SC4, the CPU 310₂ checks the local-machine log priority data P_{LL} ($= "1"$) of a local machine corresponding to the log factor (in this case, hardware error) occurring at step SC2 by referring to the local-machine log priority table TA.

The CPU 310₂ determines whether the local-machine log priority data P_{LL} ($= "1"$) is lower than the local-machine log priority threshold data P_{c2} (in this case, $"3"$) referred to at step SB3. In this case, the CPU 310₂ determines that the result of determination at step SC4 is "Yes".

At step SC5, the CPU 310₂ stores the local-machine log corresponding to the hardware error on the local-machine log storage area Z_2 . At step SC6, the CPU 310₂ determines whether the local-machine log storage area Z_2 is in a full state of memory in the same manner as the step SA4 (see Fig. 6). In this case, the CPU 310₂ determines that the result of determination is "No".

Therefore, the operational sequence from step SC2 is repeated. Accordingly, local-machine logs with priorities each higher than the preset priority are successively stored on the local-machine log storage area Z_2 .

5 When the local-machine log storage area Z_2 has entered a full state of memory due to frequent occurrences of errors in the local machine 300_2 , namely, when there is no more space for a new local-machine log on the area Z_2 , the CPU 310_2 determines that the result of determination at step SC6 is
10 "Yes".

At step SC7, the CPU 310_2 accesses the storage area B of the memory 120 via the I/F 340_2 , the communication adapter 400_2 , the network N, the communication adapter 200, and the I/F 140 in the same manner as the step SA5 (see Fig. 6). The CPU 310_2
15 then sets the memory-full flag B_2 to "1".

Accordingly, at step SC8, the CPU 110 of the remote machine 100 recognizes that the local-machine log storage area Z_2 of the local machine 300_2 is in the full state of memory. The CPU 110 then accesses the local-machine log storage area
20 Z_2 of the memory 320_2 via the I/F 140, the communication adapter 200, the network N, the communication adapter 400_2 , and the I/F 340_2 .

At step SC9, the CPU 110 collects the local-machine logs stored on the local-machine log storage area Z_2 of the memory
25 320_2 as a local-machine log LOG_{LM2} . The collected local-machine

log LOG_{LM2} has a priority higher than the priority corresponding to the local-machine log priority threshold data P_{c2}.

At step SC10, the CPU 110 stores the local-machine log LOG_{LM2} on the local-machine log storage area F of the memory 120.

5 At step SC11, the CPU 110 sets the memory-full flag B₂ corresponding to the local machine 300₂, from which the local-machine log LOG_{LM2} has been collected, from "1" to "0". The operation is repeated at step SC2 and from then on.

As explained above, according to the third example of
10 operation of the embodiment, only the high-priority local-machine logs are stored on the memory 320₁ to 320_n. Therefore, it is possible to enhance the utilization efficiency of the memory 320₁ to 320_n each of which has an upper limit to its storage capacity.

15

Fourth Example of Operation :

A fourth example of operation of the embodiment is explained below with reference to the flow chart shown in Fig. 9. In this example, the remote machine 100 collects a
20 local-machine log corresponding to a critical error from a local machine, of the local machines 300₁ to 300_n, where the critical error (hardware error) has occurred.

At step SD1 as shown in Fig. 9, the CPU 110 of the remote machine 100 initializes local-machine priority threshold data
25 P_A (= "2") in the same manner as the step SA1 (see Fig. 6).

Further, the CPU 110 checks critical error flags D_1 to D_n at predetermined time intervals based on the result of recording the time obtained from the timer 130.

At step SD2, the CPU 110 initializes the local machine
5 priority table T in the same manner as the step SA2 (see Fig. 6). At step SD3, the CPU 110 initializes local-machine log priority threshold data P_{c1} to P_{cn} in the same manner as the step SB1 (see Fig. 7).

At step SD4, each of the CPUs 310_1 to 310_n of the local
10 machines 300_1 to 300_n stores a local-machine log, each time an error occurs, on the respective local-machine log storage areas Z_1 to Z_n in correlation with the local-machine log priority data P_{LL} in the same manner as the step SA3 (see Fig. 6), and proceeds to step SD5.

15 In this case, it is assumed that the local-machine log LOG_{LMI_1} is stored on the first record of the local-machine log storage area Z_1 as shown in Fig. 3 because the hardware error (critical error) has occurred in the local machine 300_1 . At step SD5, each of the CPUs 310_1 to 310_n determines whether the
20 critical error (hardware error) has occurred at step SD4. In this case, since the hardware error as a critical error has occurred in the local machine 300_1 , the CPU 310_1 determines that the result of determination at step SD5 is "Yes".

At step SD6, the CPU 310_1 accesses the storage area D of
25 the memory 120 via the I/F 340_1 , the communication adapter 400_1 ,

the network N, the communication adapter 200, and the I/F 140. The CPU 310₁ then sets the critical error flag D₁ that corresponds to the local machine 300₁, of the critical error flags D₁ to D_n of the storage area D, to "1".

5 Accordingly, at step SD7, the CPU 110 of the remote machine 100 collects the local-machine log LOG_{LM1_1} (critical error) stored on the first record of the local-machine log storage area Z₁ of the local machine 300₁ via the I/F 140, the communication adapter 200, the network N, the communication
10 adapter 400₁, and the I/F 340₁.

 The CPU 310₂ then stores the local-machine log LOG_{LM1_1} (critical error) on the local-machine log storage area F of the memory 120. At step SD8, the CPU 110 sets the critical error flag D₁ corresponding to the local machine 300₁, from which the
15 local-machine log LOG_{LM1_1} has been collected, from "1" to "0". The operation at step SD4 and from then on is repeated.

 When any error other than the hardware error (critical error) has occurred in the local machine 300₂, the CPU 310₂ determines that the result of determination at step SD5 is "No".
20 At step SD9, the CPU 310₂ determines whether the local-machine log storage area Z₂ is in a full state of memory in the same manner as the step SA4 (see Fig. 6).

 Assuming, in this case, that the local-machine log storage area Z₂ is in a full state of memory due to frequent
25 occurrences of errors in the local machine 300₂, the CPU 310₂

determines that the result of determination at step SD9 is "Yes".
If the result of determination at step SD9 is "No", the CPU 310₂
returns to step SD4 and repeats the operation.

In this case, at step SD10, the CPU 110 of the remote
5 machine 100 executes the processing for collecting local-
machine logs from the local machine 300₂, and repeats the
operation at step SD4 and from then on. In the processing for
collecting local-machine logs, any of the processing at step
SA5 to step SA10 (First example of operation: see Fig. 6), at
10 step SB4 to step SB11 (Second example of operation: see Fig.
7), or at step SC7 to step SC11 (Third example of operation:
see Fig. 8) is executed.

As explained above, according to the fourth example of
operation of the embodiment, upon occurrence of a critical error
15 in a local machine, local-machine logs are collected from the
relevant local machine. Therefore, any critical error that has
occurred can speedily be handled.

Fifth Example of Operation :

20 In the second example of operation, the case, where the
local-machine log priority data P_{LL} concerning local-machine
logs each generated in the local machines 300₁ to 300_n is decided
as shown in Fig. 3, is explained. For example, the data P_{LL} is
decided by referring to the local-machine log priority table
25 TA common to the local machines 300₁ to 300_n. Therefore, in the

second example of operation, as shown in Fig. 3, the local-machine log priority data P_{LL} for local-machine logs concerning the same type of log factor (e.g., hardware error) is the same value (in this case "1") between the local-machine log storage areas Z_1 to Z_n .

Each of the local machines 300_1 to 300_n may have a table where data for local-machine log priorities is defined on an individual basis, and priority data for a generated local-machine log may individually be decided based on this table.

This case will be explained below as the fifth example of operation.

In this example, individual local-machine log priority tables TB_1 to TB_n (see Fig. 4), that are stored on the memories 320_1 to 320_n of the local machines 300_1 to 300_n shown in Fig. 1, are used instead of the local-machine log priority table TA used in the second example of operation. Further, individual local-machine log priority threshold data P_{E1} to P_{En} are used instead of the local-machine log priority threshold data P_{C1} to P_{Cn} used in the second example of operation.

Each of the individual local-machine log priority tables TB_1 to TB_n shown in Fig. 4 defines respective priorities (degrees of importance) of five types of local-machine logs (a hardware error log to an insignificant error log) with five levels from "1" to "5" in the same manner as the local-machine log priority table TA. However, individual local-machine log priority data

PS_{LL} is defined on an individual basis in each of the individual local-machine log priority tables TB_1 to TB_n .

That is, even if the same type of local-machine logs (log factors) exist between the individual local-machine log priority tables TB_1 to TB_n , the individual local-machine log priority data PS_{LL} corresponding to each of the logs is different. Referring to the hardware error logs (hardware errors) in shaded areas in Fig. 4, for example, the individual local-machine log priority data PS_{LL} for the hardware error log is "1" in the individual local-machine log priority tables TB_1 . Whereas, in the individual local-machine log priority tables TB_2 , the individual local-machine log priority data PS_{LL} for the hardware error log (hardware error) is "3". Further, in the individual local-machine log priority tables TB_n , the individual local-machine log priority data PS_{LL} for the hardware error log (hardware error) is "2".

Each of the individual local-machine log priority threshold data P_{E1} to P_{En} stored on the storage area E shown in Fig. 1 corresponds to each of the local machines 300_1 to 300_n , and one of the values of the local-machine log priorities "1" to "5" (decimal) is taken.

The individual local-machine log priority threshold data P_{E1} is a threshold value used for collecting local-machine logs from the local machine 300_1 . In this case, local-machine logs each with a local-machine log priority higher than the priority

corresponding to the individual local-machine log priority threshold data P_{E1} are collected from the local machine 300_1 .

The individual local-machine log priority threshold data P_{E2} is a threshold value used for collecting local-machine logs from the local machine 300_2 . In this case, local-machine logs each with a local-machine log priority higher than the priority corresponding to the individual local-machine log priority threshold data P_{E2} are collected from the local machine 300_2 .

Similarly, the individual local-machine log priority threshold data P_{En} is a threshold value used for collecting local-machine logs from the local machine 300_n . In this case, local-machine logs each with a local-machine log priority higher than the priority corresponding to the individual local-machine log priority threshold data P_{En} are collected from the local machine 300_n .

At step SE1 as shown in Fig. 10, the CPU 110 of the remote machine 100 initializes each of the individual local-machine log priority threshold data P_{E1} to P_{En} . In this case, the CPU 110 initializes "2" (decimal) out of "1" to "5" as the individual local-machine log priority threshold data P_{E1} . Accordingly, "001" (binary) corresponding to the "2" (decimal) are set in bits E_{11} to E_{13} on the storage area E of the memory 120.

Similarly, the CPU 110 initializes "3" (decimal) out of "1" to "5" as the individual local-machine log priority threshold data P_{E2} . Accordingly, "010" (binary) corresponding

to the "3" (decimal) are set in bits E_{21} to E_{23} on the storage area E of the memory 120.

The CPU 110 then initializes "3" (decimal) out of "1" to "5" as the individual local-machine log priority threshold data P_{En} in the same manner as explained above. Accordingly, "010" (binary) corresponding to the "3" (decimal) are set in bits E_{n1} to E_{n3} on the storage area E of the memory 120. Further, the CPU 110 checks the memory-full flags B_1 to B_n at predetermined time intervals based on the result of recording the time obtained from the timer 130.

At step SE2, each of the CPUs 310_1 to 310_n of the local machines 300_1 to 300_n determines whether a log factor (e.g., a hardware error, a firmware error/software error) has occurred, and repeats the processing of determination when the result of determination is "No". For example, when a hardware error has occurred as a log factor in the local machine 300_n , the CPU 310_n determines that the result of determination is "Yes".

At step SE3, the CPU 310_n of the local machine 300_n stores the local-machine log LOG_{LMn_3} of the local-machine log storage area Z_n shown in Fig. 5 on the local-machine log storage area Z_n . In the storage area, this local-machine log LOG_{LMn_3} is correlated with the individual local-machine log priority data PS_{LL} (= "2") of the individual local-machine log priority table TB_n shown in Fig. 4.

At step SE4, the CPU 310_n determines, in the same manner

as the step SA4 (see Fig. 6), whether the local-machine log storage area Z_n of the memory 320_n is in a full state of memory. In this state, the CPU 310_n determines that the result of determination is "No". Therefore, the operational sequence
5 from step SE2 is repeated. Thus, the local-machine logs are stored on the local-machine log storage area Z_n in order of their generation as shown in Fig. 5.

When the local-machine log storage area Z_n has entered a full state of memory due to frequent occurrences of errors
10 in the local machine 300_n, namely such a state that there is no more space for a new local-machine log on the area Z_n , the CPU 310_n determines that the result of determination at step SE4 is "Yes".

At step SE5, the CPU 310_n accesses the storage area B of
15 the memory 120 via the I/F 340_n, the communication adapter 400_n, the network N, the communication adapter 200, and the I/F 140 in the same manner as the step SA5 (see Fig. 6), and then sets the memory-full flag B_n to "1".

Accordingly, at step SE6, the CPU 110 of the remote
20 machine 100 recognizes that the local-machine log storage area Z_n of the local machine 300_n is in the full state of memory. The CPU 110 refers to the individual local-machine log priority threshold data P_E (in this case, $P_{En} = "3"$) corresponding to the local machine 300_n, of the individual local-machine log priority
25 threshold data P_{E1} to P_{En} .

At step SE7, the CPU 110 accesses the local-machine log storage area Z_n of the memory 320_n via the I/F 140, the communication adapter 200, the network N, the communication adapter 400_n, and the I/F 340_n. The CPU 110 then determines
 5 whether the individual local-machine log priority data PS_{LL} (= "2") in the third record of the local-machine log storage area Z_n shown in Fig. 5 is lower than the individual local-machine log priority threshold data P_E (in this case, P_{En} (= "3")).

In other words, the CPU 110 determines whether the
 10 priority of the local-machine logs LOG_{LMn_3} is higher than the priority set at step SE1. In this case, the CPU 110 determines that the result of determination at step SE7 is "Yes". If the result of determination at step SE7 is "No", the CPU 110 proceeds to step SE10.

15 In this case, at step SE8, the CPU 110 collects the local-machine log LOG_{LMn_3} in the third record of the local-machine log storage area Z_n via the I/F 340_n, the communication adapter 400_n, the network N, the communication adapter 200, and the I/F 140.

20 At step SE9, the CPU 110 stores the local-machine log LOG_{LMn_3} on the local-machine log storage area F of the memory 120. At step SE10, the CPU 110 determines whether there is a next local-machine log in the local-machine log storage area Z_n . In this case, the CPU 110 determines that the result of
 25 determination is "Yes", and returns to step SE7.

The operation is repeated from then on. Of the plurality of local-machine logs stored on the local-machine log storage area Z_n , the local-machine logs each with a local-machine log priority higher than the priority initialized at step SE1 are collected by the CPU 110 of the remote machine 100.

When the processing for the last record of the local-machine log storage area Z_n is finished, the CPU 110 determines that the result of determination at step SE10 is "No". At step SE11, the CPU 110 sets the memory-full flag B_n corresponding to the local machine 300_n from "1" to "0". The operation is repeated at step SE2 and from then on.

As explained above, according to the fifth example of operation of the embodiment, respective priorities of local-machine logs corresponding to a plurality of local machines are set individually. Therefor, even if the same type of local-machine logs exist, each of their priorities can be made different between the plurality of local machines. Thus, local-machine logs can flexibly be collected according to the state of the respective local machines.

Sixth Example of Operation :

A sixth example of operation of the embodiment is explained below with reference to the flow chart shown in Fig. 11. In this example, when any critical error (e.g., a hardware error) has occurred in the remote machine 100, the collection

of local-machine logs, that is supposed to be performed by the remote machine 100, is executed by an arbitrary machine of the local machines 300_1 to 300_n for the remote machine 100.

At step SF1 as shown in Fig. 11, the CPU 110 of the remote machine 100 determines whether a critical error has occurred in the remote machine 100, and proceeds to step SF6 when the result of determination is "No". At step SF6, the CPU 110 executes any type of operation, of the first to fifth examples of operation, for collecting local-machine logs, returns to step SF1, and repeats the operation. The CPUs 310_1 to 310_n of the local machines 300_1 to 300_n check remote-machine substitute request flags X_{11} to X_{n1} at predetermined time intervals based on the results of recording the times by timers 330_1 to 330_n , respectively.

When a hardware error as a critical error has occurred in the remote machine 100, the remote machine 100 determines that the result of determination at step SF1 is "Yes". At step SF2, the CPU 110 sets an arbitrary remote-machine substitute request flag, of the remote-machine substitute request flags X_{11} to X_{n1} , to "1". Precisely, the CPU 110 requests an arbitrary local machine, of the local machines 300_1 to 300_n , to act as a substitute to execute the collection of local-machine logs. It is assumed, in this case, that the local machine 300_2 has been requested to be a substitute to execute the collection of local-machine logs.

Therefore, the CPU 110 accesses the memory 320₂ via the I/F 140, the communication adapter 200, the network N, the communication adapter 400₂, and the I/F 340₂, and sets the remote-machine substitute request flag X₂₁ to "1". Accordingly, the CPU 310₂ of the local machine 300₂ recognizes that the CPU 310₂ itself has been requested from the remote machine 100 to act as a substitute to execute the collection of local-machine logs. The CPU 310₂ then accesses the memory 120 via the I/F 340₂, the communication adapter 400₂, the network N, the communication adapter 200, and the I/F 140 to acquire reference data D_{RM}.

The reference data D_{RM} we mention here is information required for the collection of local-machine logs. This reference data D_{RM} includes the local machine priority table T, the local-machine priority threshold data P_A, the memory-full flags B₁ to B_n, the local-machine log priority threshold data P_{c1} to P_{cn}, the critical error flags D₁ to D_n, and the individual local-machine log priority threshold data P_{E1} to P_{En}. The reference data D_{RM} also includes the local-machine logs stored on the local-machine log storage area F and the remote logs stored on the remote log storage area G.

The CPU 310₂ stores the acquired reference data D_{RM} on the memory 320₂. At step SF4, the CPU 310₂ sets the remote-machine substitute declaration flags Y₁₂ to Y_{n2} (excluding Y₂₂) of local machines except the local machine 300₂ to "1". Accordingly,

the respective CPUs of the local machines except the local machine 300₂ recognize that the local machine 300₂ acts as a substitute to execute the collection of local-machine logs for the remote machine 100.

5 At step SF5, the CPU 310₂ of the local machine 300₂ acts as a substitute to perform the processing for the remote machine. In other words, the CPU 310₂ executes the operation (one of the first to fifth examples of operation) of collecting local-machine logs using the reference data D_{RM} in the same manner
10 as the CPU 110 of the remote machine 100. In this case, the CPUs of the local machines except the local machine 300₂ operate by setting the local machine 300₂ as a destination of their access instead of the remote machine 100.

As explained above, according to the sixth example of
15 operation of the embodiment, even if a critical error has occurred, an arbitrary local machine acts as a substitute to execute the collection of local-machine logs. Therefore, the collection of local-machine logs can continuously be performed, which allows reliability to be enhanced.

20

Seventh Example of Operation :

A seventh example of operation of the embodiment is explained below with reference to the flow chart shown in Fig. 12. In this example, when any critical error (e.g., hardware
25 error) has occurred in the remote machine 100, the collection

of local-machine logs that is supposed to be operated by the remote machine 100 is executed by some other machine, of the local machines 300_1 to 300_n , that has the lowest local machine priority.

5 At step SG1 as shown in Fig. 12, the CPU 110 of the remote machine 100 determines whether a critical error has occurred in the remote machine 100, and proceeds to step SG7 when the result of determination is "No". At step SG7, the CPU 110 executes any operation, of the first to fifth examples of
10 operation, of collecting local-machine logs, returns to step SG1, and repeats the operation. The CPUs 310_1 to 310_n of the local machines 300_1 to 300_n check remote-machine substitute request flags X_{11} to X_{n1} at predetermined time intervals based on the results of recording the times by timers 330_1 to 330_n ,
15 respectively.

When a hardware error as a critical error has occurred in the remote machine 100, the remote machine 100 determines that the result of determination at step SG1 is "Yes". At step SG2, the CPU 110 accesses the memory 120 to refer to the local
20 machine priority table T and recognizes a local machine with the lowest local machine priority of the local machines 300_1 to 300_n . It is assumed, in this case, that the CPU 110 recognizes the local machine 300_n as one with the lowest local machine priority.

25 At step SG3, the remote-machine substitute request flag

X_{n1} of the local machine 300_n is set to "1". In other words, the CPU 110 requests the local machine 300_n with the lowest local machine priority, of the local machines 300_1 to 300_n , to act as a substitute to execute the collection of local-machine logs.

5 Therefore, the CPU 110 accesses the memory 320_2 via the I/F 140, the communication adapter 200, the network N, the communication adapter 400_n , and the I/F 340_n , and sets the remote-machine substitute request flag X_{n1} to "1". Accordingly, the CPU 310_n of the local machine 300_n recognizes that the CPU
10 310_n itself has been requested from the remote machine 100 to act as a substitute to execute the collection of local-machine logs. At step SG4, the CPU 310_n then accesses the memory 120 via the I/F 340_n , the communication adapter 400_n , the network N, the communication adapter 200, and the I/F 140 to acquire
15 reference data D_{RM} .

 The reference data D_{RM} mentioned here is the information required for the collection of local-machine logs. This reference data D_{RM} includes the local machine priority table T, the local-machine priority threshold data P_A , the memory-full
20 flags B_1 to B_n , the local-machine log priority threshold data P_{c1} to P_{cn} , the critical error flags D_1 to D_n , and the individual local-machine log priority threshold data P_{E1} to P_{En} . The reference data D_{RM} also includes the local-machine logs stored on the local-machine log storage area F and the remote logs
25 stored on the remote log storage area G.

The CPU 310₂ stores the acquired reference data D_{RM} on the memory 320₂. At step SG5, the CPU 310_n sets the remote-machine substitute declaration flags Y_{1n} to Y_{nn-1} of local machines except the local machine 300_n to "1". Accordingly, the respective CPUs
5 of the local machines except the local machine 300_n recognize that the local machine 300_n acts as a substitute to execute the collection of local-machine logs.

At step SG6, the CPU 310_n of the local machine 300_n acts as a remote-machine substitute to perform the processing. In
10 other words, the CPU 310_n executes the operation (one of the first to fifth examples of operation) of collecting local-machine logs using the reference data D_{RM} in the same manner as the CPU 110 of the remote machine 100. In this case, the CPUs of the local machines except the local machine 300_n operate
15 by setting the local machine 300_n as a destination of their access instead of the remote machine 100.

As explained above, according to the seventh example of operation of the embodiment, when a critical error has occurred, any local machine with the lowest priority is allowed to act
20 as a substitute to execute the collection of local-machine logs. Therefore, the collection of local-machine logs can continuously be performed. Thus, it is possible to avoid degradation in performance of the other local machines with high priorities.

25 Although the invention has been explained in detail with

respect to the embodiment with reference to the drawings, it is to be understood that concrete examples of the configuration are not limited by the embodiment and modifications and alterations without departing from the spirit of the invention
5 may also be embraced by the invention.

For example, collection or generation of local-machine logs may be performed by the steps as follows. That is, the steps of recording the information collecting program or the information generating program to realize the functions of the
10 remote machine 100 or the functions of the local machines 300₁ to 300_n on the computer-readable recording medium 600 shown in Fig. 13, and reading the information collecting program or the information generating program recorded on this recording medium 600 into the computer 500 shown in Fig. 13 for its
15 execution.

The computer 500 shown in Fig. 13 comprises a CPU 501 that executes the information collecting program or the information generating program, an input device 502 such as a mouse, ROM (Read Only Memory) 503 that stores various data, and RAM (Random
20 Access Memory) 504 that stores operation parameters or the like. The computer 500 further comprises a reader 505 that reads the information collecting program or the information generating program from the recording medium 600, an output device 506 such as a display and a printer, and a bus BU that connects between
25 the devices.

The CPU 501 collects or generates the remote machine logs by reading the information collecting program or the information generating program recorded on the recording medium 600 via the reader 505 and executing the read-in information
5 collecting program or the information generating program. The recording medium 600 includes not only a portable recording medium such as an optical disk, a floppy disk, or a hard disk, but also any transport media such as a network that temporarily records and holds data.

10 As explained above, according to one aspect of this invention, respective priorities to be given to a plurality of information generation apparatuses are defined, and information is collected only from the information generation apparatus whose priority is high. Therefore, pieces of
15 information generated in the information generation apparatuses with high priorities can be collected more as compared to those in the conventional case. Further, only the information generated in the information generation apparatus with a high priority is stored on the collection-side
20 information storage unit. Resultantly, it is possible to enhance the utilization efficiency of the collection-side information storage unit that has an upper limit to its storage capacity.

According to another aspect of this invention, only
25 pieces of information with high priorities are collected.

Therefore, of the information generated in the relevant information generation apparatus, pieces of information with high priorities can be collected more as compared to those in the conventional case. Further, only the information with a high priority is stored on the collection-side information storage unit. Resultantly, it is possible to enhance the utilization efficiency of the collection-side information storage unit that has an upper limit to its storage capacity.

Further, the priorities of respective information are individually set in correspondence with a plurality of information generation apparatuses, respectively. Therefore, even if the same type of information exists, each of the priorities can be made different between the plurality of information generation apparatuses. Resultantly, information can flexibly be collected according to the state of the respective information generation apparatuses.

According to still another aspect of this invention, upon occurrence of a certain error in an information generation apparatus, information is collected from the relevant information generation apparatus. Resultantly, any error that has occurred can speedily be handled.

Further, even when a certain error has occurred, the collection of information can be executed by an arbitrary information generation apparatus as a substitute. Resultantly, the collection of information can continuously be performed,

which allows reliability to be enhanced.

Further, when a certain error has occurred, any information generation apparatus with the lowest priority is allowed to act as a substitute to execute the operation of
5 collecting information. Therefore, the collection of information can be continued. Resultantly, it is possible to avoid degradation in respective performance of the other information generation apparatuses with high priorities.

According to still another aspect of this invention, only
10 information with a high priority is stored. Resultantly, it is possible to enhance the utilization efficiency of the information storage unit that has an upper limit to its storage capacity.

Although the invention has been described with respect
15 to a specific embodiment for a complete and clear disclosure, the appended claims are not to be thus limited but are to be construed as embodying all modifications and alternative constructions that may occur to one skilled in the art which fairly fall within the basic teaching herein set forth.

WHAT IS CLAIMED IS:

1. An information collection apparatus which collects information via transmission lines from a plurality of information generation apparatuses, wherein each of said information generation apparatus has a generation-side information storage unit which stores the information generated due to its specific generation factor, said information collection apparatus comprising:

a table storage unit which stores a priority definition table in which respective priorities of said plurality of information generation apparatuses are defined;

an information collection unit which refers to the priority definition table upon reception of a notice from any of said information generation apparatuses in which the amount of information stored on said generation-side information storage unit has reached a predetermined amount, and collects the information stored on the generation-side information storage unit of the relevant information generation apparatus only when the priority of the relevant information generation apparatus is higher than the preset priority; and

a collection-side information storage unit which stores the information collected by said information collection unit.

2. The information collection apparatus according to claim 1 further comprising a substitution control unit which allows any one or more of said information generation apparatuses to act as a substitute to execute the operation of collecting information, that is supposed to be executed by said information collection unit, when a given error has occurred.

3. The information collection apparatus according to claim 2, wherein said substitution control unit allows an information generation apparatus out of said information generation apparatuses with the lowest priority to act as the substitute, to execute the operation of collecting information.

4. An information collection apparatus which collects information via transmission lines from a plurality of information generation apparatuses, wherein each of said information generation apparatus has a generation-side information storage unit which stores the information generated due to its specific generation factor, said information collection apparatus comprising:

an information collection unit which collects information with priorities higher than the preset priority upon reception of a notice from any of said information generation apparatuses in which the amount of information stored on said generation-side information storage unit has

reached a predetermined amount; and

a collection-side information storage unit which stores the information collected by said information collection unit.

5 5. The information collection apparatus according to claim 4, wherein the priorities are set separately for each of said information generation apparatuses.

6. The information collection apparatus according to claim 10 4 further comprising a substitution control unit which allows any one or more of said information generation apparatuses to act as a substitute to execute the operation of collecting information, that is supposed to be executed by said information collection unit, when a given error has occurred.

15

7. The information collection apparatus according to claim 6, wherein said substitution control unit allows an information generation apparatus out of said information generation apparatuses with the lowest priority to act as the substitute, 20 to execute the operation of collecting information.

8. An information collection apparatus which collects information via transmission lines from a plurality of information generation apparatuses, wherein each of said 25 information generation apparatus has a generation-side

information storage unit which stores the information generated due to its specific generation factor, said information collection apparatus comprising:

an information collection unit which collects
5 information stored on the generation-side information storage unit of any information generation apparatus upon reception of a notice from the relevant information generation apparatus in which a given error has occurred; and

a collection-side information storage unit which stores
10 the information collected by said information collection unit.

9. The information collection apparatus according to claim
8 further comprising a substitution control unit which allows
any one or more of said information generation apparatuses to
15 act as a substitute to execute the operation of collecting information, that is supposed to be executed by said information collection unit, when a given error has occurred.

10. The information collection apparatus according to claim
20 9, wherein said substitution control unit allows an information generation apparatus out of said information generation apparatuses with the lowest priority to act as the substitute, to execute the operation of collecting information.

11. An information generation apparatus which generates information to be collected by an information collection apparatus via a transmission line, said information generation apparatus comprising:

5 an information generation unit which generates information due to its specific generation factor; and

 an information storage unit which stores the generated information only when the relevant information has a priority higher than the preset priority.

10

12. A computer-readable recording medium where an information collecting program, with which information is collected via transmission lines from a plurality of information generation apparatuses each of which has a generation-side information storage unit that stores information generated due to its specific generation factor, is recorded, said program for making a computer execute the steps of:

15

 storing a priority definition table in which respective
20 priorities of said plurality of information generation apparatuses are defined in a table storage unit;

 referring to the priority definition table upon reception of notification from any of said information generation apparatuses in which the amount of information stored on said
25 generation-side information storage unit has reached a

predetermined amount, and collecting the information stored on the generation-side information storage unit of the relevant information generation apparatus only when the priority of the relevant information generation apparatus is higher than the
5 preset priority; and

storing the collected information in a collection-side information storage unit.

13. A computer-readable recording medium where an
10 information generating program, with which information to be collected by the information collection apparatus via a transmission line is generated, is recorded, said program for making a computer execute the steps of:

generating information based on specific generation
15 factor; and

storing the generated information only when the relevant information has a priority higher than the preset priority.

ABSTRACT OF THE DISCLOSURE

This invention has a remote machine that collects local-machine logs via a network from a plurality of local machines, each of which has memory that stores local-machine logs generated due to its specific generation factor. This remote machine has a CPU that collects local-machine logs stored on the memory of a local machine only when the priority of the local machine is higher than the preset priority.

100;REMOTE MACHINE

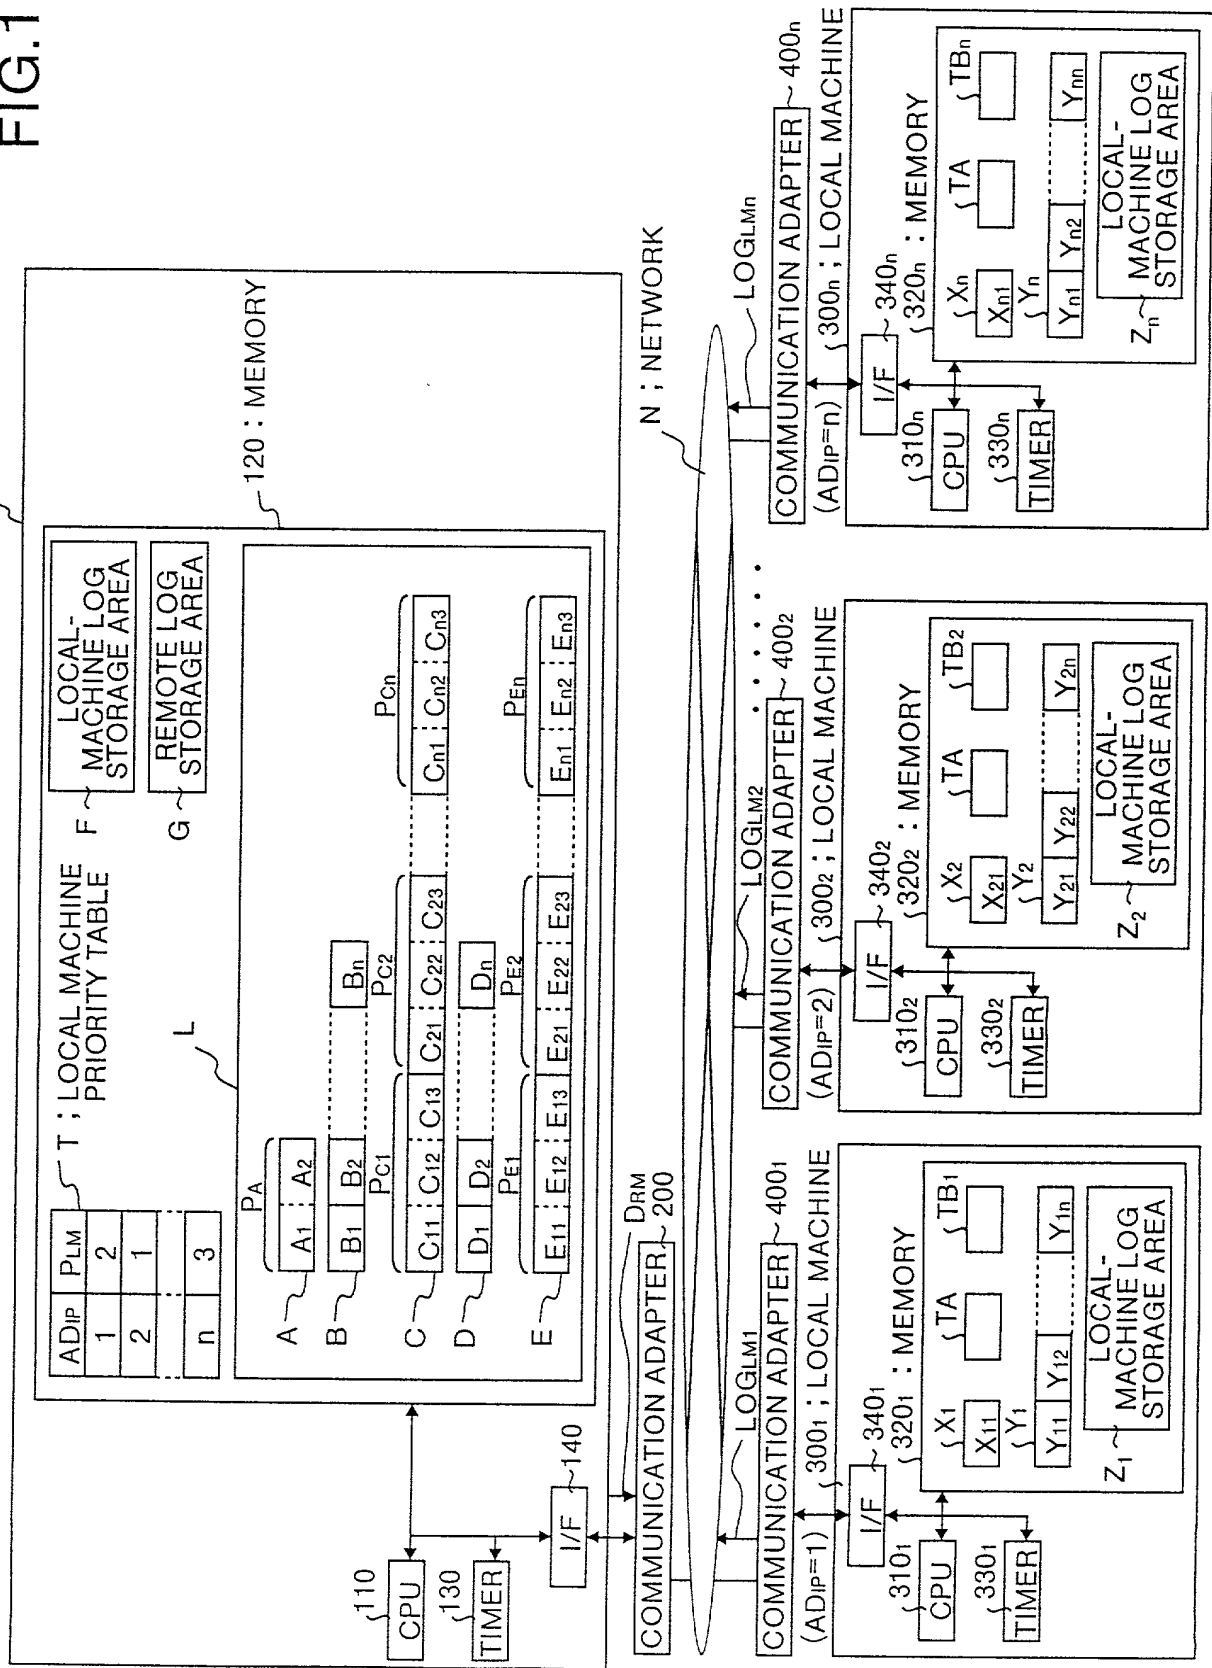


FIG.2

TA ; LOCAL-MACHINE LOG PRIORITY TABLE

LOCAL-MACHINE LOG PRIORITY DATA PLL	LOG FACTOR	LOCAL-MACHINE LOG
1	HARDWARE ERROR	HARDWARE ERROR LOG
2	FIRMWARE ERROR/ SOFTWARE ERROR	FIRMWARE ERROR/ SOFTWARE ERROR LOG
3	LINE ERROR/ PROTOCOL ERROR	LINE ERROR/ PROTOCOL ERROR LOG
4	WARNING ERROR	WARNING ERROR LOG
5	INSIGNIFICANT ERROR	INSIGNIFICANT ERROR LOG

FIG.3

Z₁ ; LOCAL-MACHINE LOG STORAGE AREA

IP ADDRESS AD _{IP} =1		
LOCAL-MACHINE LOG PRIORITY DATA PLL	LOCAL-MACHINE LOG	LOG FACTOR
1	LOG _{LM1_1}	HARDWARE ERROR
3	LOG _{LM1_2}	LINE ERROR/ PROTOCOL ERROR
1	LOG _{LM1_3}	HARDWARE ERROR
⋮	⋮	⋮

Z₂ ; LOCAL-MACHINE LOG STORAGE AREA

IP ADDRESS AD _{IP} =2		
LOCAL-MACHINE LOG PRIORITY DATA PLL	LOCAL-MACHINE LOG	LOG FACTOR
5	LOG _{LM2_1}	INSIGNIFICANT ERROR
2	LOG _{LM2_2}	FIRMWARE ERROR/ SOFTWARE ERROR
1	LOG _{LM2_3}	HARDWARE ERROR
⋮	⋮	⋮

⋮

Z_n ; LOCAL-MACHINE LOG STORAGE AREA

IP ADDRESS AD _{IP} =n		
LOCAL-MACHINE LOG PRIORITY DATA PLL	LOCAL-MACHINE LOG	LOG FACTOR
4	LOG _{LMn_1}	WARNING ERROR
3	LOG _{LMn_2}	LINE ERROR/ PROTOCOL ERROR
2	LOG _{LMn_3}	FIRMWARE ERROR/ SOFTWARE ERROR
⋮	⋮	⋮

FIG.4

TB₁ ; INDIVIDUAL LOCAL-MACHINE
LOG PRIORITY TABLE

INDIVIDUAL LOCAL-MACHINE LOG PRIORITY DATA PSL _L	LOG FACTOR	LOCAL-MACHINE LOG
1	HARDWARE ERROR	HARDWARE ERROR LOG
2	FIRMWARE ERROR/ SOFTWARE ERROR	FIRMWARE ERROR/ SOFTWARE ERROR LOG
3	LINE ERROR/ PROTOCOL ERROR	LINE ERROR/ PROTOCOL ERROR LOG
4	WARNING ERROR	WARNING ERROR LOG
5	INSIGNIFICANT ERROR	INSIGNIFICANT ERROR LOG

TB₂ ; INDIVIDUAL LOCAL-MACHINE
LOG PRIORITY TABLE

INDIVIDUAL LOCAL-MACHINE LOG PRIORITY DATA PSL _L	LOG FACTOR	LOCAL-MACHINE LOG
1	LINE ERROR/ PROTOCOL ERROR	LINE ERROR/ PROTOCOL ERROR LOG
2	WARNING ERROR	WARNING ERROR LOG
3	HARDWARE ERROR	HARDWARE ERROR LOG
4	FIRMWARE ERROR/ SOFTWARE ERROR	FIRMWARE ERROR/ SOFTWARE ERROR LOG
5	INSIGNIFICANT ERROR	INSIGNIFICANT ERROR LOG

⋮

TB_n ; INDIVIDUAL LOCAL-MACHINE
LOG PRIORITY TABLE

INDIVIDUAL LOCAL-MACHINE LOG PRIORITY DATA PSL _L	LOG FACTOR	LOCAL-MACHINE LOG
1	FIRMWARE ERROR/ SOFTWARE ERROR	FIRMWARE ERROR/ SOFTWARE ERROR LOG
2	HARDWARE ERROR	HARDWARE ERROR LOG
3	LINE ERROR/ PROTOCOL ERROR	LINE ERROR/ PROTOCOL ERROR LOG
4	WARNING ERROR	WARNING ERROR LOG
5	INSIGNIFICANT ERROR	INSIGNIFICANT ERROR LOG

FIG.5

Z₁ ; LOCAL-MACHINE LOG
STORAGE AREA

IP ADDRESS AD _{IP} =1		
INDIVIDUAL LOCAL-MACHINE LOG PRIORITY DATA P _{LL}	LOCAL-MACHINE LOG	LOG FACTOR
1	LOG _{LM1_1}	HARDWARE ERROR
3	LOG _{LM1_2}	LINE ERROR/ PROTOCOL ERROR
1	LOG _{LM1_3}	HARDWARE ERROR
⋮	⋮	⋮

Z₂ ; LOCAL-MACHINE LOG
STORAGE AREA

IP ADDRESS AD _{IP} =2		
INDIVIDUAL LOCAL-MACHINE LOG PRIORITY DATA P _{LL}	LOCAL-MACHINE LOG	LOG FACTOR
5	LOG _{LM2_1}	INSIGNIFICANT ERROR
2	LOG _{LM2_2}	WARNING ERROR
1	LOG _{LM2_3}	LINE ERROR/ PROTOCOL ERROR
⋮	⋮	⋮

Z_n ; LOCAL-MACHINE LOG
STORAGE AREA

IP ADDRESS AD _{IP} =n		
INDIVIDUAL LOCAL-MACHINE LOG PRIORITY DATA P _{LL}	LOCAL-MACHINE LOG	LOG FACTOR
4	LOG _{LMn_1}	WARNING ERROR
3	LOG _{LMn_2}	LINE ERROR/ PROTOCOL ERROR
2	LOG _{LMn_3}	HARDWARE ERROR
⋮	⋮	⋮

FIG.6

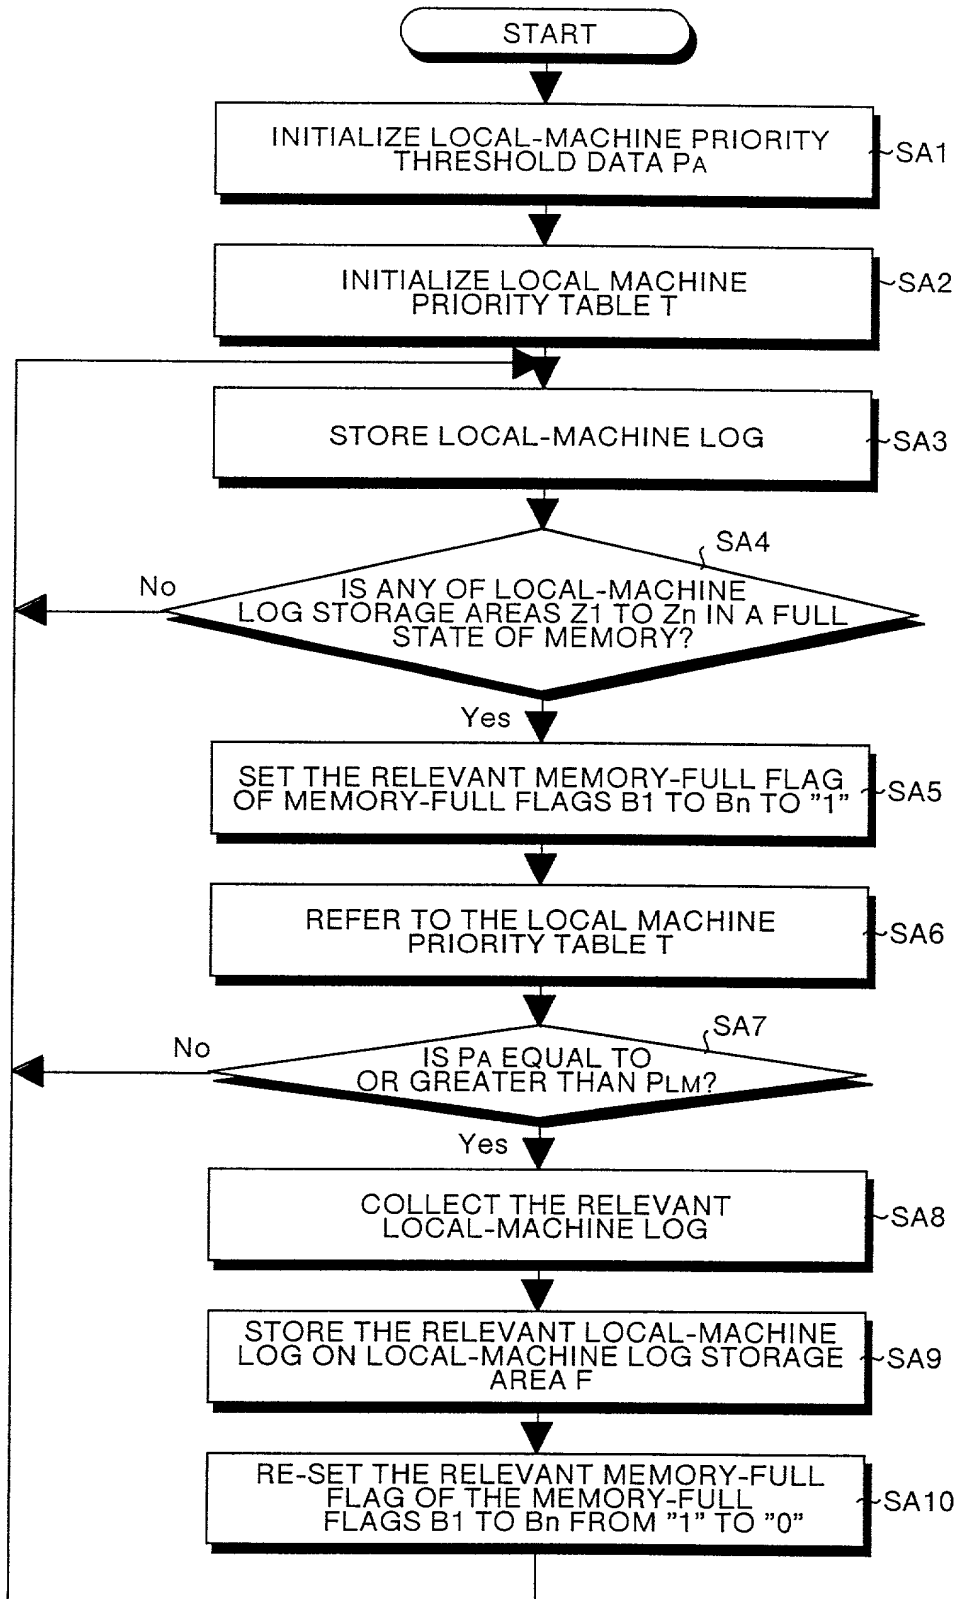


FIG.7

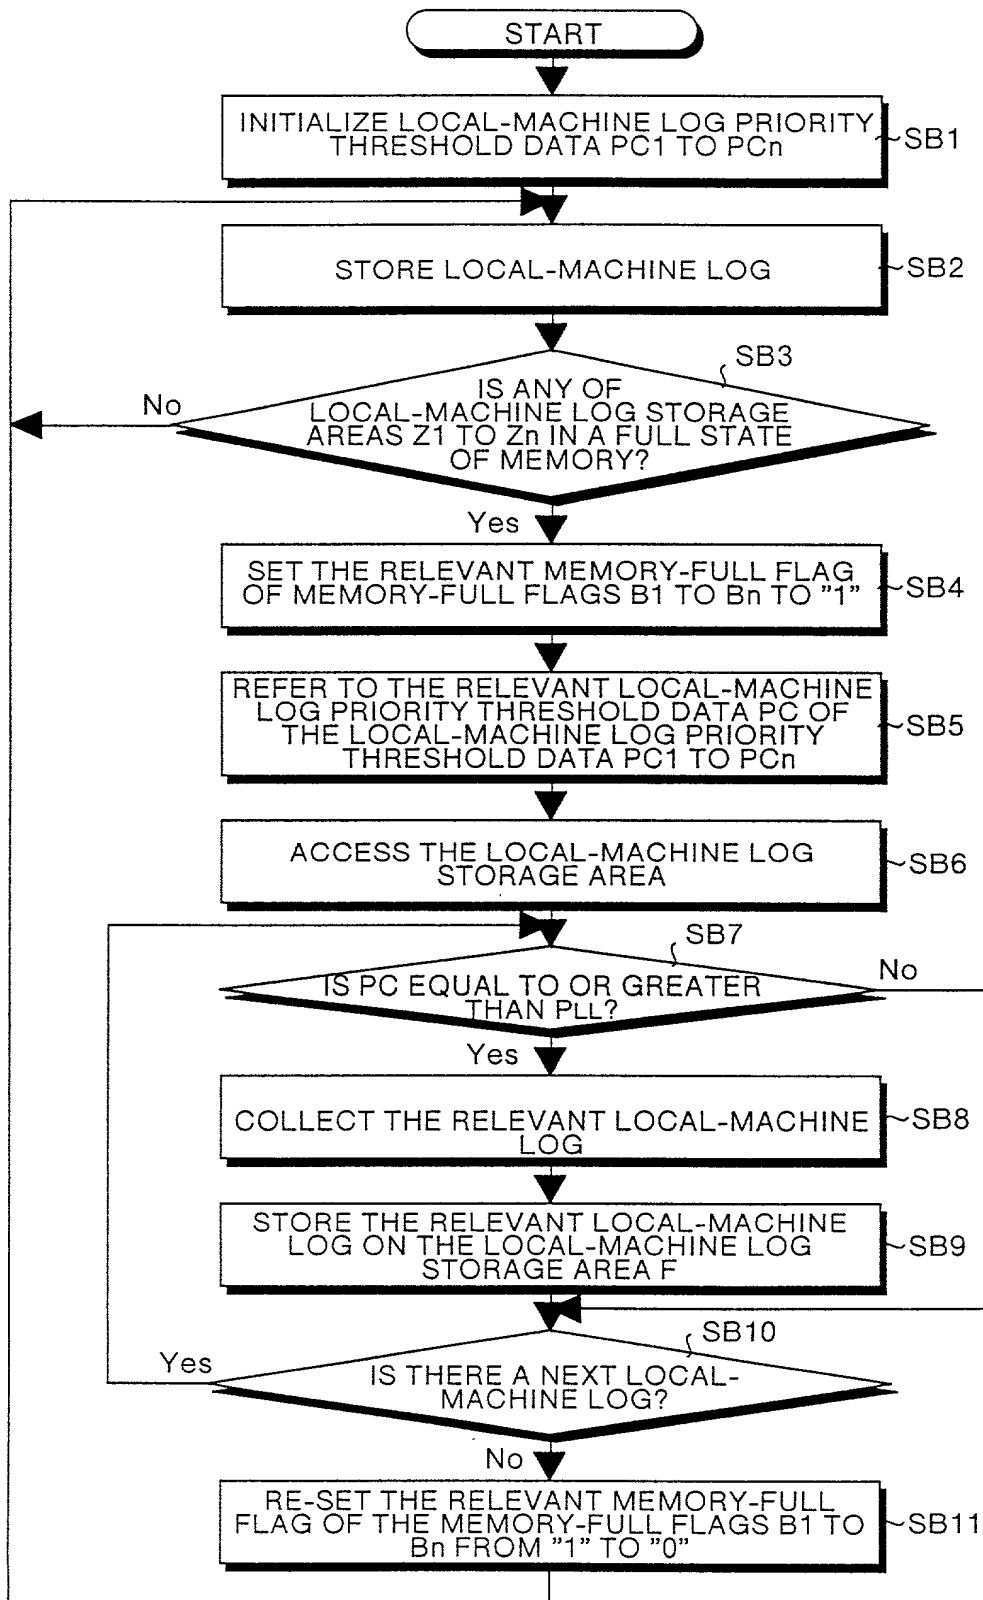


FIG.8

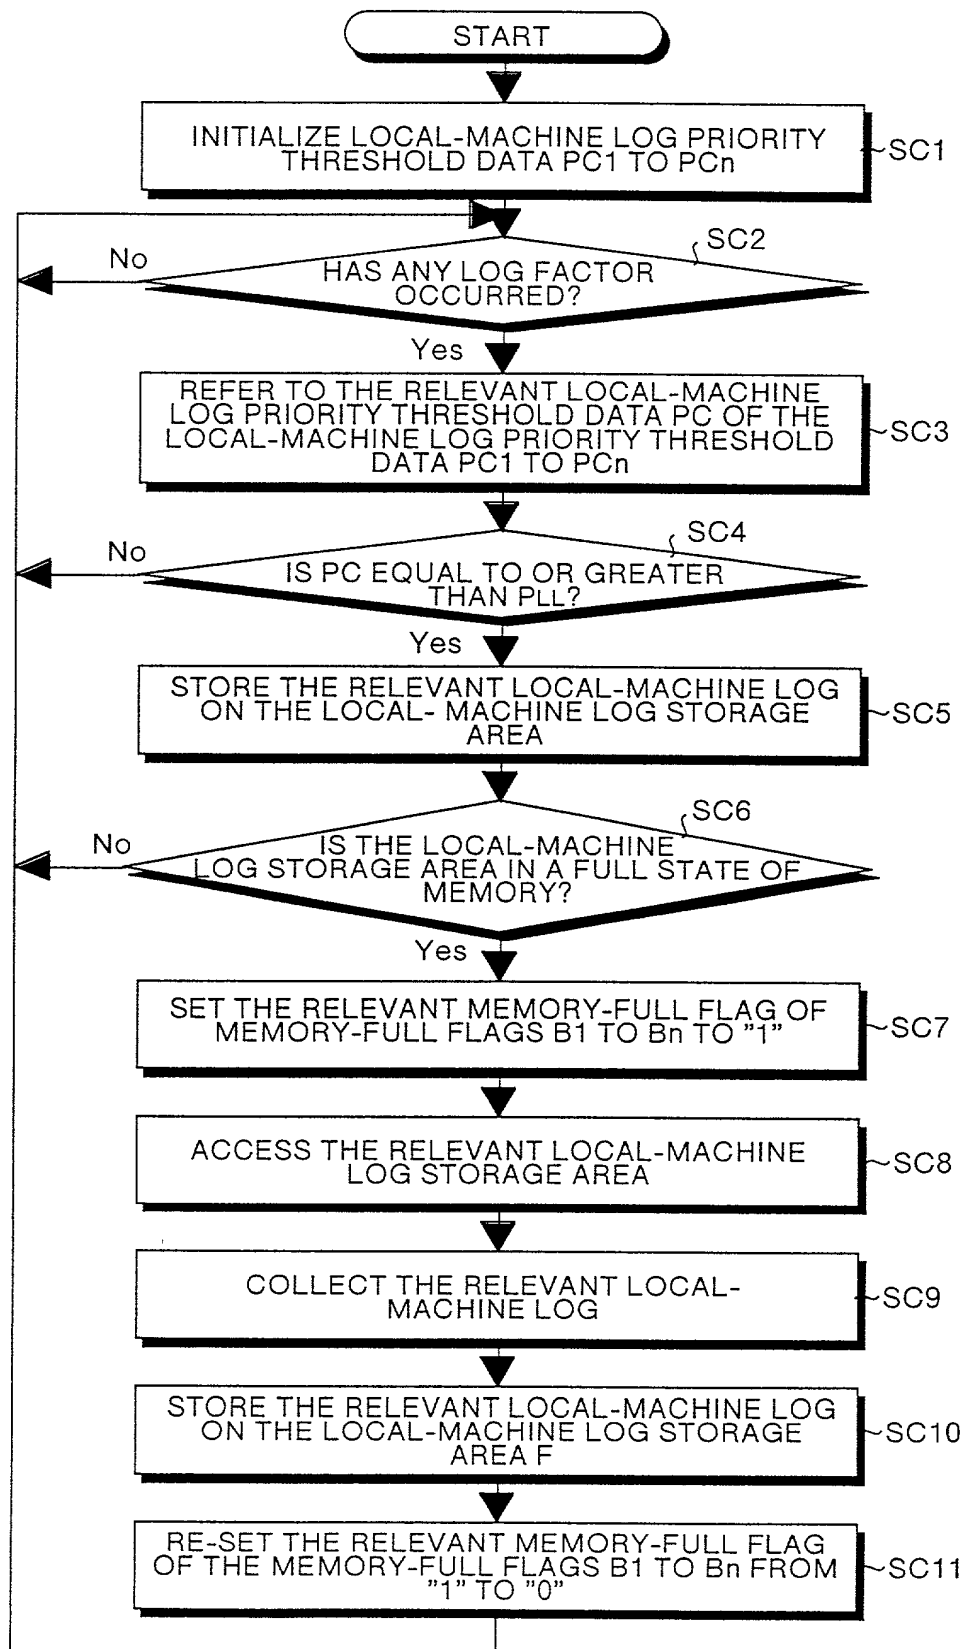


FIG.9

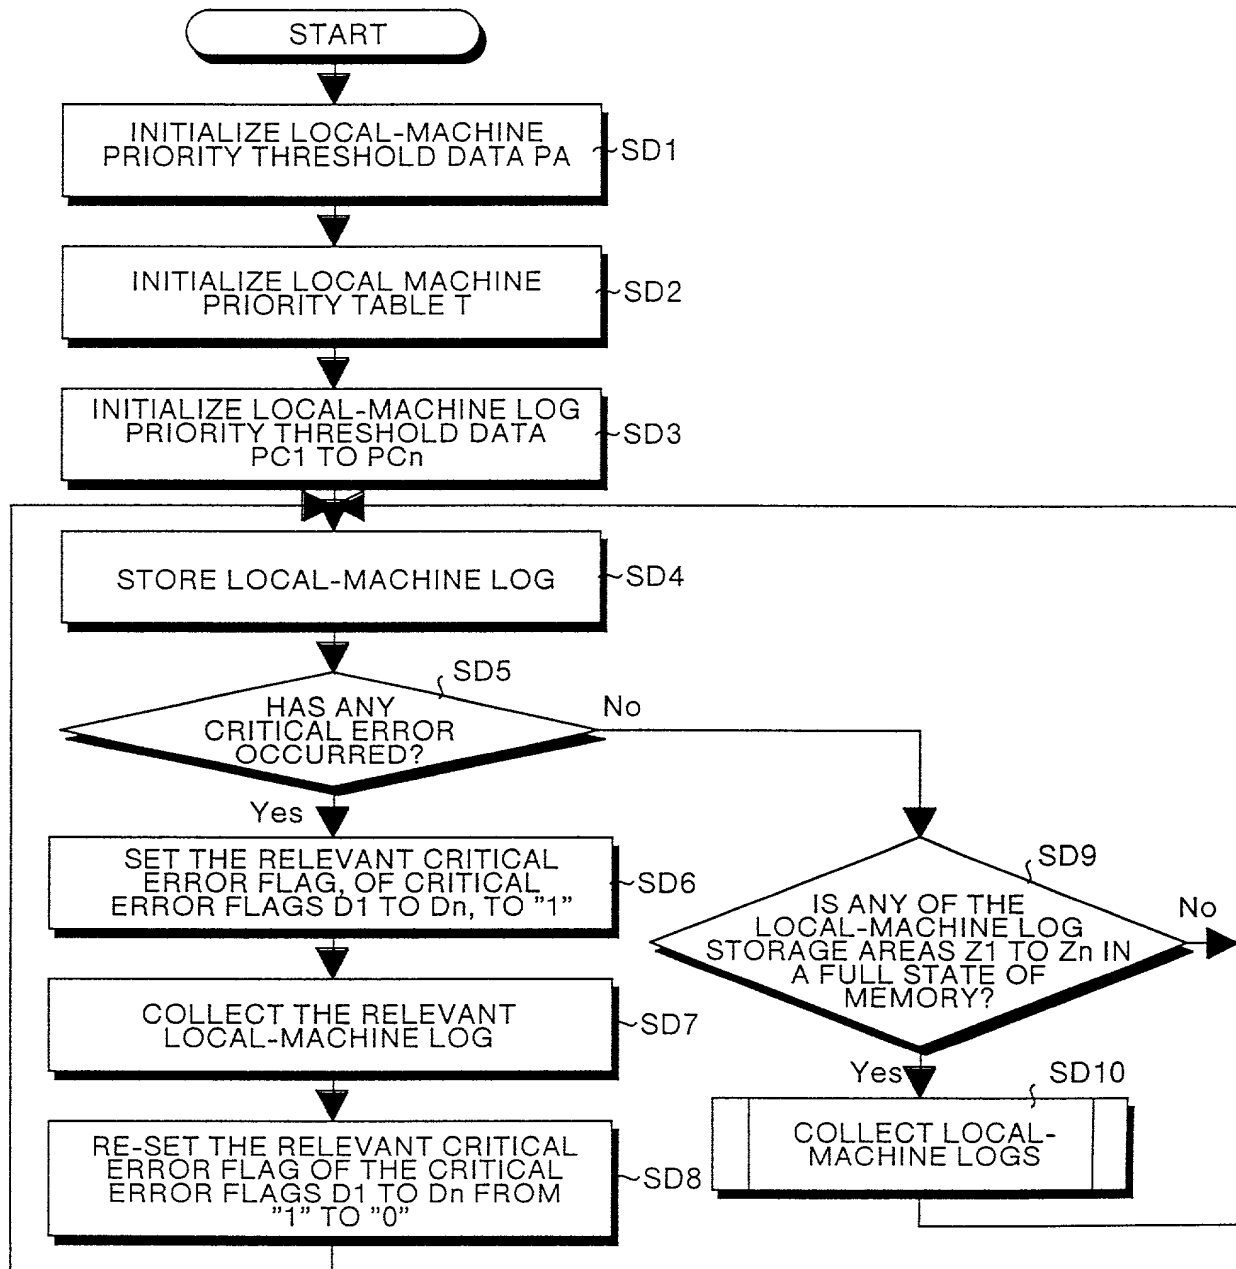


FIG.10

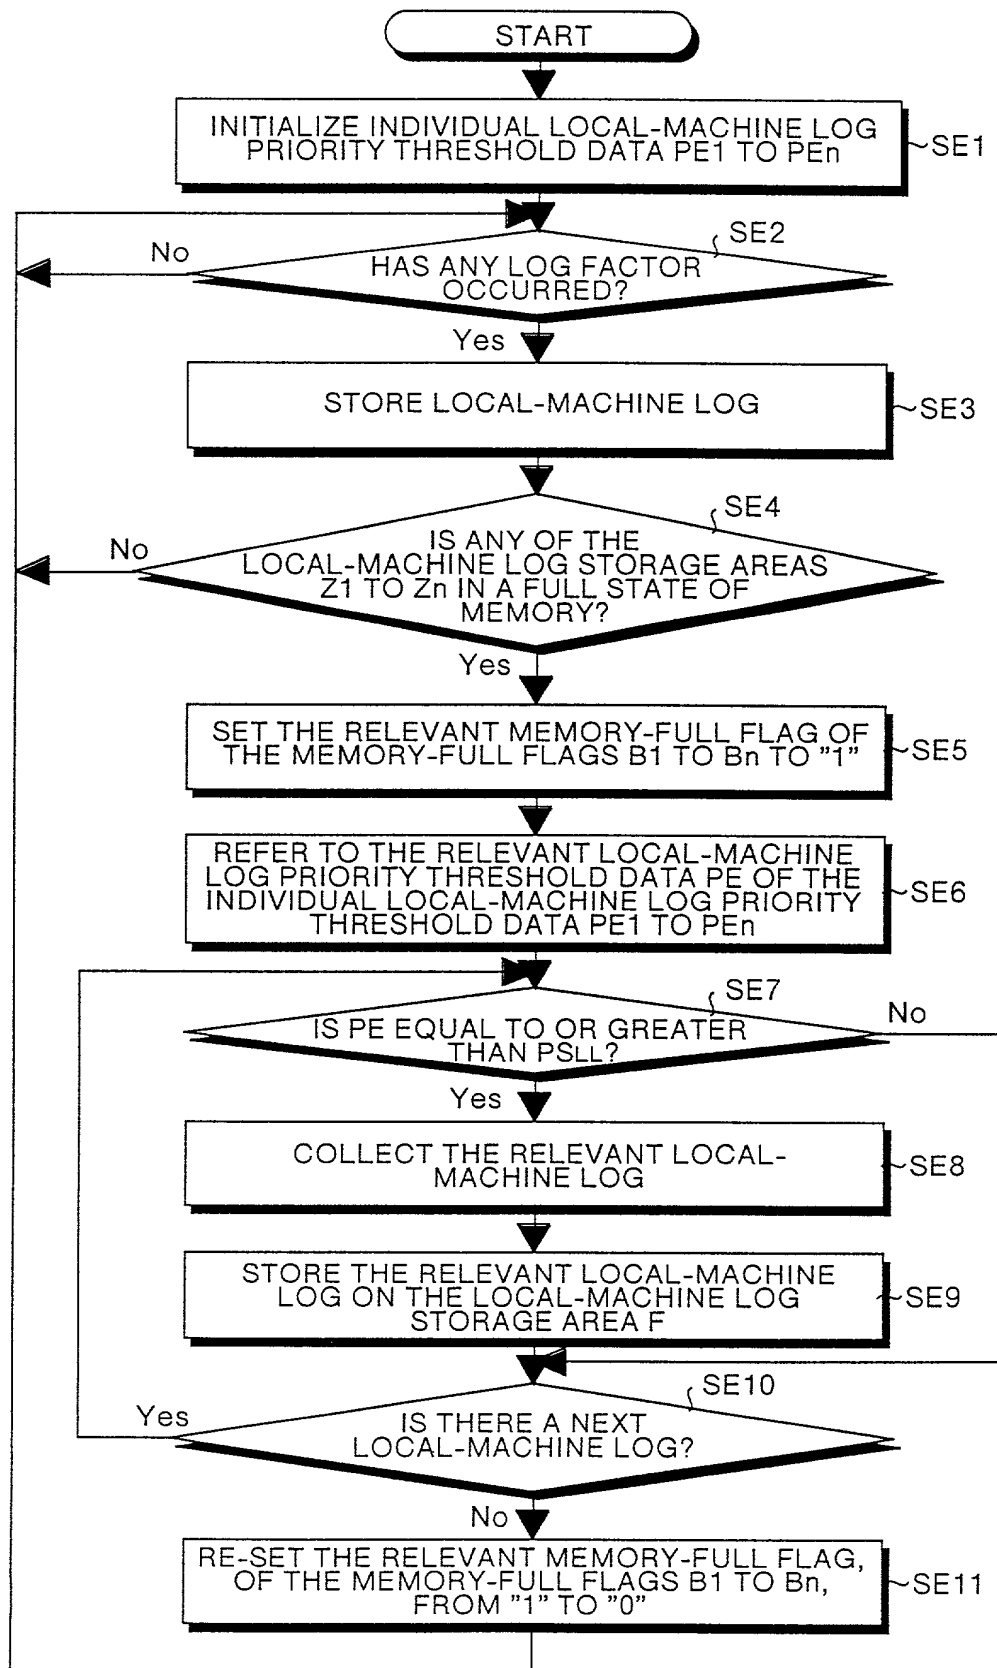


FIG.11

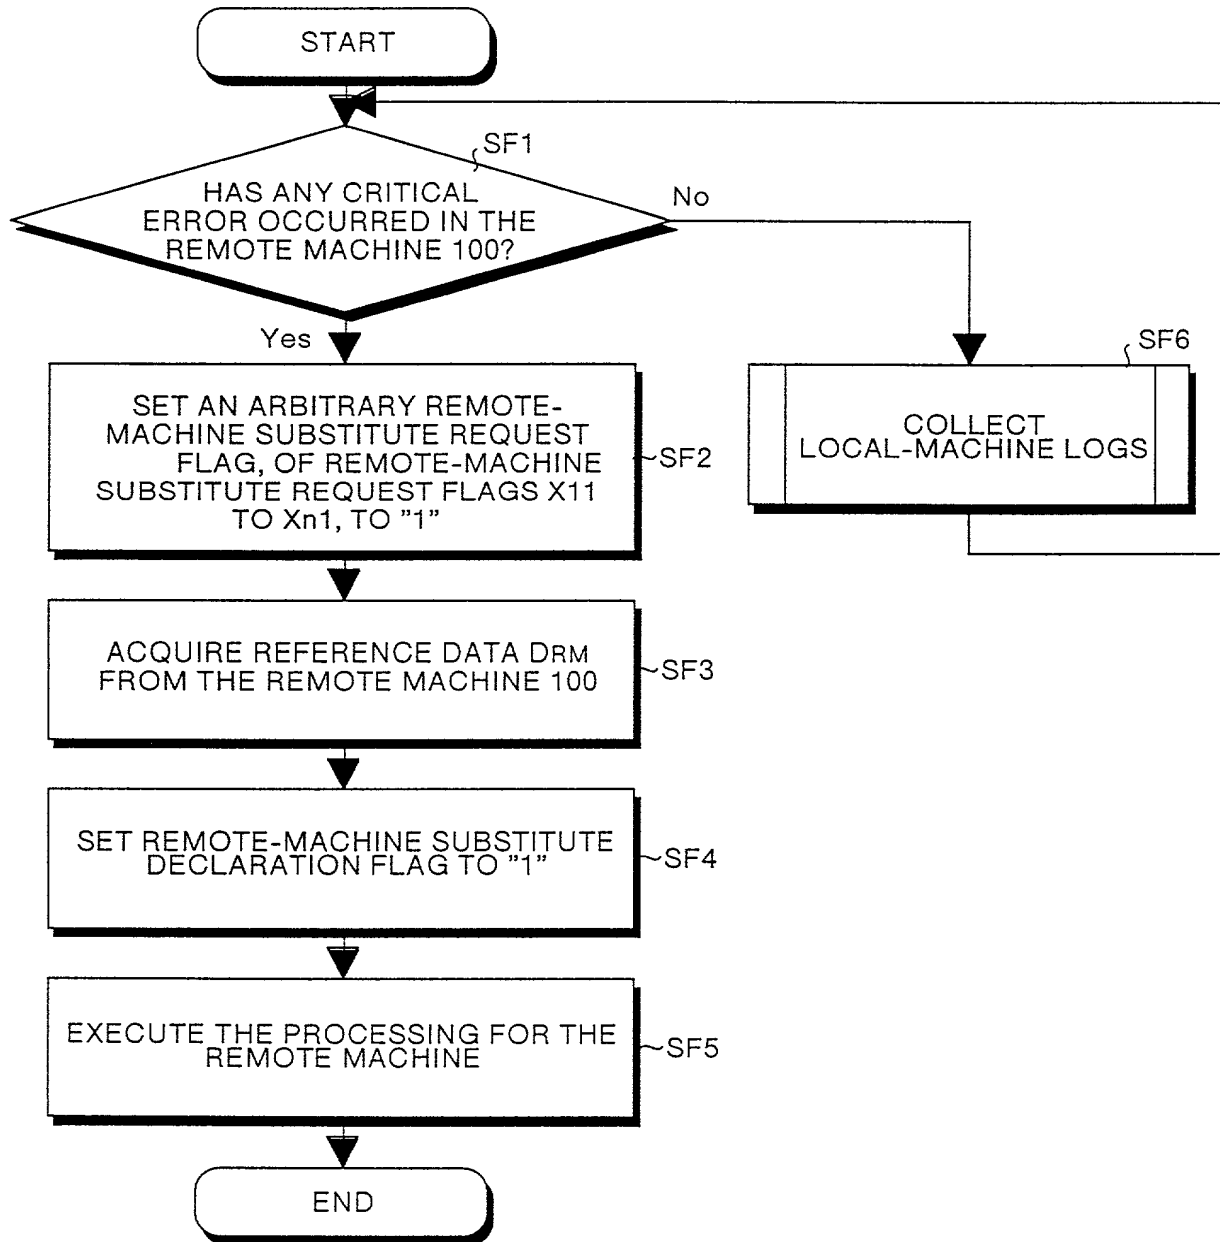


FIG.12


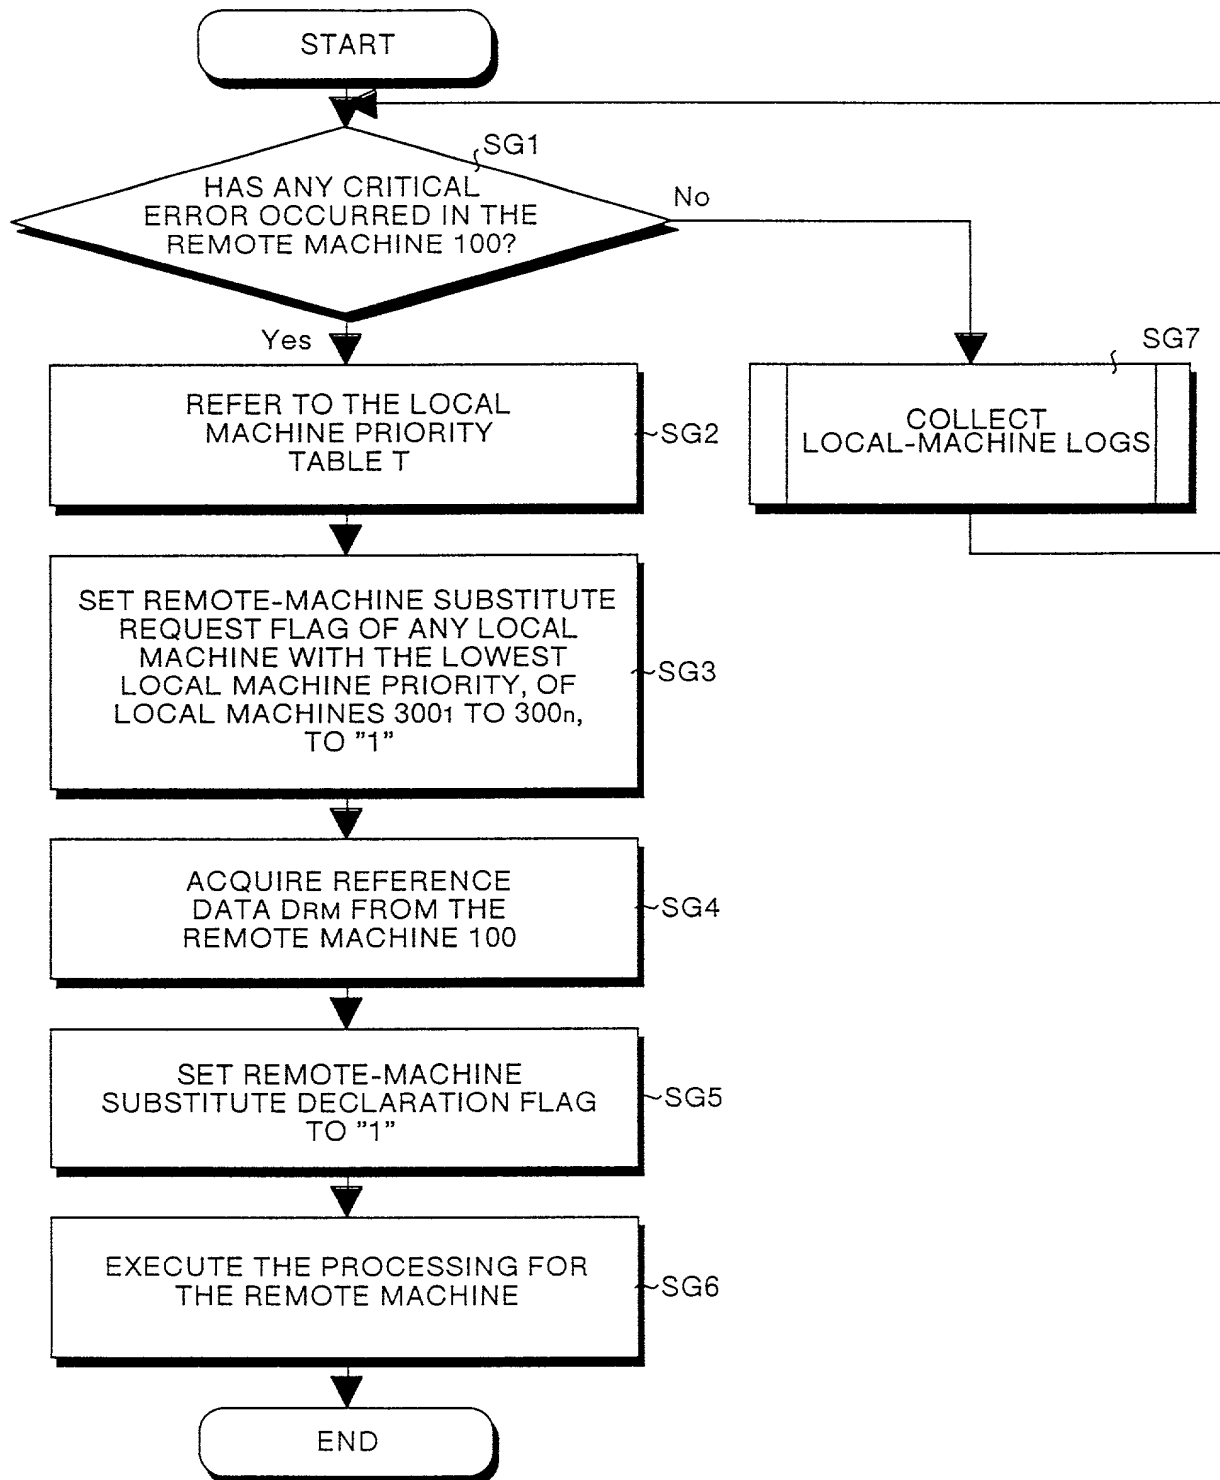


FIG.13

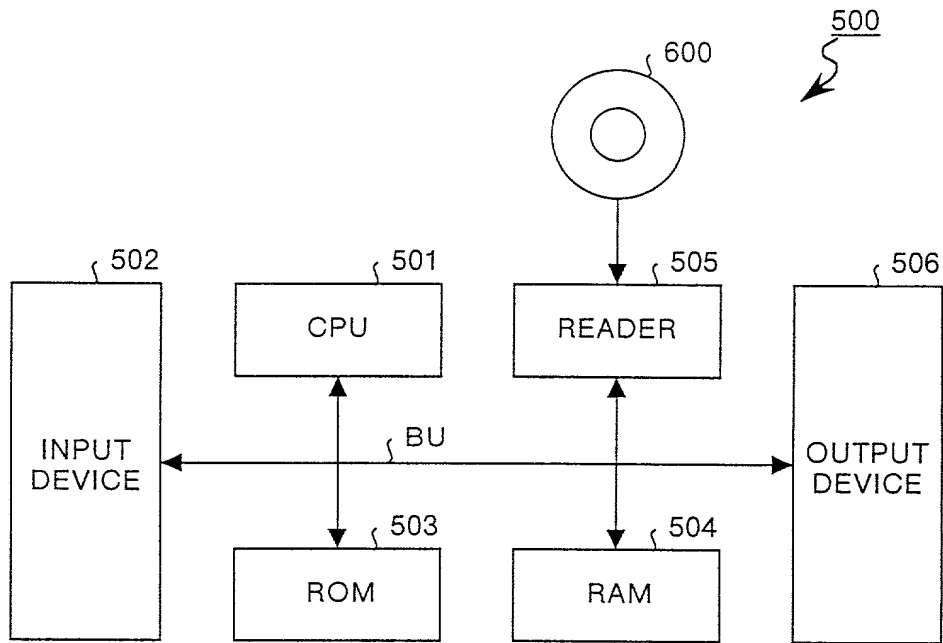

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Declaration and Power of Attorney For Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

APPARATUSES FOR GENERATION AND
COLLECTION OF INFORMATION, AND
COMPUTER-READABLE RECORDING
MEDIUM

上記発明の明細書（下記の欄でx印がついていない場合は、本書に添付）は、

the specification of which is attached hereto unless the following box is checked:

☐ 月 日に提出され、米国出願番号または特許協定条約国際出願番号を _____ とし、
(該当する場合) _____ に訂正されました。

☐ was filed on _____
as United States Application Number or
PCT International Application Number
_____ and was amended on
_____ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されたとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Page 1 of 3

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner of Patents and Trademarks, Washington, DC 20231.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration (日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国以外の国の少なくとも一ヵ国を指定している特許協力条約365(a)項に基づき国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している。本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

Prior Foreign Application(s)

外国での先行出願
11-330520

(Number)
(番号)

Japan

(Country)
(国名)

(Number)
(番号)

(Country)
(国名)

私は、第35編米国法典119条(e)項に基づいて下記の米国特許出願規定に記載された権利をここに主張いたします。

(Application No.)
(出願番号)

(Filing Date)
(出願日)

私は、下記の米国法典第35編120条に基づいて下記の米国特許出願に記載された権利、又は米国を指定している特許協力条約365条(c)に基づき権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国特許出願に開示されていない限り、その先行米国出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

(Application No.)
(出願番号)

(Filing Date)
(出願日)

(Application No.)
(出願番号)

(Filing Date)
(出願日)

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じていることに基づき表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の表明を行えば、出願した、又は後に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Priority Not Claimed

優先権主張なし

19/Nov./1999

(Day/Month/Year Filed)
(出願年月日)

(Day/Month/Year Filed)
(出願年月日)

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.)
(出願番号)

(Filing Date)
(出願日)

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

(Status: Patented, Pending, Abandoned)
(現況: 特許許可済、係属中、放棄済)

(Status: Patented, Pending, Abandoned)
(現況: 特許許可済、係属中、放棄済)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration (日本語宣言書)

委任状: 私は下記の発明者として、本出願に関する一切の
手続きを米特許審判局に対して遂行する弁理士または代理人
として、下記の者を指名いたします。(弁理士、または代理
士氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint
the following attorney(s) and/or agent(s) to prosecute this
application and transact all business in the Patent and Trademark
Office connected therewith (list name and registration number)

James D. Halsey, Jr., 22,729; Harry John Staas, 22,010; David M. Pitcher, 25,908; John C. Garvey, 28,607; J. Randall Beckers, 30,358;
William F. Herbert, 31,024; Richard A. Gollhofer, 31,106; Mark J. Henry, 36,162; Gene M. Garner II, 34,172; Michael D. Stein, 37,240; Paul
I. Kravetz, 35,230; Gerald P. Joyce, III, 37,648; Todd E. Marlette, 35,269; Harlan B. Williams, Jr., 34,756; George N. Stevens, 36,938;
Michael C. Soldner, P-41,455 and William M. Schertler, 35,348 (agent)

書類送付先

Send Correspondence to:

STAAS & HALSEY
700 Eleventh Street, N.W.
Suite 500
Washington, D.C. 20001

直接電話連絡先: (名前及び電話番号)

Direct Telephone Calls to: (name and telephone number)

STAAS & HALSEY
(202) 434-1500

唯一または第一発明者名	Full name of sole or first inventor Mayumi NOGUCHI		
発明者の署名	日付	Inventor's signature <i>Mayumi Noguchi</i>	Date Aug. 10, 2000
住所	Residence Kawasaki, Japan		
国籍	Citizenship Japanese		
私書箱	Post Office Address c/o FUJITSU LIMITED 1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki-shi, Kanagawa 211-8588 Japan		
第二共同発明者	Full name of second joint inventor, if any Tetsuo CHIMOTO		
第二共同発明者	日付	Second inventor's signature <i>Tetsuo Chimoto</i>	Date Aug. 10, 2000
住所	Residence Kawasaki, Japan		
国籍	Citizenship Japanese		
私書箱	Post Office Address c/o FUJITSU LIMITED 1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki-shi, Kanagawa 211-8588 Japan		

(第三以降の共同発明者についても同様に記載し、署名をす
ること)

(Supply similar information and signature for third and subsequent
joint inventors.)